

K48L

Compact, Series 3
48 PS



A compact tractor that doesn't compromise on performance

This compact tractor delivers all the advantages of the K48 in a powerful package optimized for wet conditions. Operators can ride in comfort and accomplish a variety of tasks without compromising on performance.



1. Tilt steering wheel




3. PTO switch



2. Digital Instrument Panel



4. External hydraulic control lever

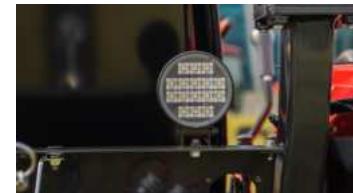

5. Rear LED work light



6. Rear external hydraulic valve



4-cylinder high-output TYM diesel engine

Equipped with a powerful 4-cylinder, Stage V engine, this tractor boasts the power of a mid-sized tractor while maintaining a compact size.



Excellent lift capacity

With an enhanced 3-point lift, heavy implements can be easily lifted, allowing more types of implements to be installed



Longest wheelbase in class

The wheelbase has been maximized for increased stability and towing power.



High ground clearance

A high ground clearance means that you can prevent damage to crops in the field and work more efficiently. (Up to 395 mm)



PTO lever

Control the RPM of the implement during operation with the PTO lever.



Wide/low tires

Wider tires with low walls allows higher maneuverability in low-ceiling greenhouses.



Minimized turning radius (10° caster)

The narrow turning radius makes it easy to make turns in tight spaces.



41 HP PTO

Best-in-class PTO output makes even plowing quick and easy.

Technical specifications

ENGINE		PTO	
Engine manufacturer	TYM T2300	PTO type	Independent
Type	Natural aspiration	PTO control	Electric/Hydro
Gross engine power	48 PS 35.5 kW	PTO rear	540/750/1000 rpm
POWERTRAIN		HYDRAULIC SYSTEM	
PTO power	41 PS 30 kW	Pump type	Gear pump
Rated engine speed	2600 rpm	Implement flow	43.2 L/min 11.41 gpm
No. of cylinders	4	Steering flow	19.4 L/min 5.13 gpm
Displacement	2287 cc 139.56 cu. in.	Total flow	62.6 L/min 16.54 gpm
Air cleaner	Dry element	Category, 3-point hitch	Cat1
Alternator	12V, 50A	Hitch lift capacity	1365 kg 3009 lb
Fuel system	IDI	Hitch lift capacity at 24 inches behind link ends	637 kg 1404 lb
CAPACITIES		Lift control type	Position/Draft
Fuel tank	27 L 7.13 gal	No. of standard remote valves	4
Coolant	3.0 L 3.17 qt	DIMENSIONS & WEIGHTS	
Crankcase	4.5 L 4.75 qt	Overall length with 3-point hitch	3160 mm 124.40 in.
Transmission/Hydraulics system	34 L 8.98 gal	Overall width	1535 mm 60.43 in.
Front axle	6.4 L 6.76 qt	Wheelbase	1720 mm 67.71 in.
		Height to top of ROPS	2450 mm 96.45 in.
		Height to top of cabin	-
		Min. ground clearance	395 mm 15.55 in.
		Min. turn radius with brakes	(L) 2490 mm 98.03 in. / (R) 2390 mm 94.09 in.
		Min. turn radius without brakes	(L) 3170 mm 124.80 in. / (R) 3080 mm 121.26 in.
		Weight with ROPS	1580 kg 3483.30 lb
		Weight with cab	-
		Track width	F: 1270 mm / R: 1195 mm
		STANDARD TIRES	
		Agricultural - Front	7-16
		Agricultural - Rear	11.2-24

KJA42 Front-End Loader

Attachments

The TYM KJA42 front-end loader raises the bar in material handling and productivity. Providing an impressive lift height and capacity, the KJA42 complements the power and performance of compatible TYM K42, K48 or K48L compact tractors.

Lift height	3115 mm 122.6 in.
Lift capacity at pivot point (max. height)	940 kgf 2072 lb
Self leveling	Available



CAPACITIES & REACH

Lift height	3115 mm 122.6 in.
Max. lift height under level bucket	2902 mm 114.3 in.
Clearance with bucket dumped	2422 mm 95.4 in.
Reach at maximum lift height	168 mm 6.6 in.
Max. dump angle	80°
Reach with bucket on ground	2155 mm 84.8 in.
Max. rollback angle	50°
Digging depth	130 mm 5.1 in.
Lift capacity at pivot point (max. height)	940 kgf 2072 lb
Breakout force at ground level, pivot pins	1343 kgf 2961 lb
Bucket rollback force at ground line	1556 kgf 3430 lb
Self leveling	Available
Relief valve setting (loader control valve)	165 kg/sq. cm 2347 psi
Compatible bucket sizes	66" Front-end loader bucket

DIMENSIONS & WEIGHTS

Overall height in carry position	1670 mm 65.7 in.
Depth of Attachment (to the back of the inner shell)	549 mm 21.6 in.
Height of Attachment	510 mm 20.1 in.
Length of Attachment (to pivot pin)	665 mm 26.2 in.
Weight of boom & quick attach mechanism (1)	238 kg 525 lb
Weight of mounting frame (2)	85 kg 187 lb
Weight of bucket (3)	108 kg 238 lb
Loader total weight (1+2+3)	431 kg 950 lb
Lift cylinder	60 × 40 mm 2.4 × 1.6 in.
Bucket cylinder	60 × 35 mm 2.4 × 1.4 in.
Attachment used for specification	1570 mm 61.8 in.

CYCLE TIMES

Boom raising time	4.5 sec
Boom lowering time	3.1 sec
Bucket rollback time	2.2 sec
Bucket dumping time	3.0 sec

COMPATIBLE BUCKET SIZES

TYM's multi-purpose buckets are capable of bulldozing, scraping, loading, metering, moving, and clamping material.

66" Front-End Loader bucket



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world