

2025 Catalog

Series 4

Compact Tractors

45.3 - 57.3 hp



For distribution and sales in International territories only

Series 4 Compact Tractors

The Series 4 compact tractors combine optimized dimensions and maximized lift capabilities. An efficient engine and a larger

fuel tank make these tractors ideal for semi-private to commercial-scale challenges.



T495

Engine power Lift capacity
45.3 hp 1733 kg



T455

Engine power Lift capacity
46.6 hp 1503 kg



5025C

Engine power Lift capacity
48 hp 1456 kg



5025

Engine power Lift capacity
48 hp 1456 kg



5825

Engine power Lift capacity
54.3 hp 1500 kg



T575

Engine power Lift capacity
55 hp 1733 kg



T555

Engine power Lift capacity
55.1 hp 1503 kg



6225C

Engine power Lift capacity
57.3 hp 1456 kg

Series 4

Compact Tractors



6225

Engine power	Lift capacity
57.3 hp	1456 kg

Balancing performance with maximized maneuverability

The Series 4 tractors have high lift capacities for the hitch and optional loader, making them ideal for carrying heavier loads and connecting to larger attachments. Enjoy the productive comfort of a premium operator cabin complete with joystick controls for loaders and remote valves for rear attachments.

Maneuverability and power come together to equip these tractors to take on a range of medium to heavy-duty applications, from managing farm animals efficiently to clearing large plots of land.


Most popular applications



Livestock &
Poultry




Land
Clearing &
Forestry



Material
Handling



Landscaping

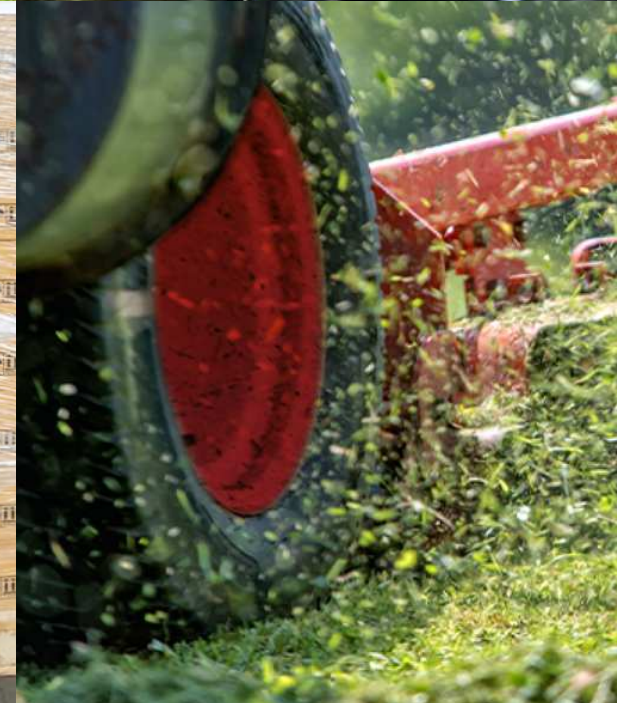

All the right features to get the job done



Telescopic linkages and stabilizers

Telescopic linkages allow attachments to be easily connected and swapped out without needing input from the operator cabin. Stabilizers make it possible for the tractor to adapt to attachments of varying loads, without putting too much pressure on engine productivity.



4-cylinder TYM diesel engine with high output

Equipped with a powerful, Stage V certified 4-cylinder engine, this tractor has an output comparable to utility tractors while maintaining the dimensions of a sub-compact tractor. The durable body and efficient engine come together to perform medium duty applications efficiently and productively.




Superior operator amenities

Fully equipped with modern amenities to maximize operator comfort, this tractor is complete with a large cup holder, wireless smartphone charging dock, multiple USB ports to charge personal devices and a bluetooth speaker. These features are designed to promote productivity, keeping drivers hydrated, connected and alert during every job.



Durable power steering and axle configuration

The heavy-duty 4WD front axle enables the tractor to lift heavy loads and tow large attachments while absorbing shock and maintaining stability. Powerful hydraulics support the power steering system, which uses a dual-action mechanism with a hydraulic cylinder and tandem-type hydraulic pump.

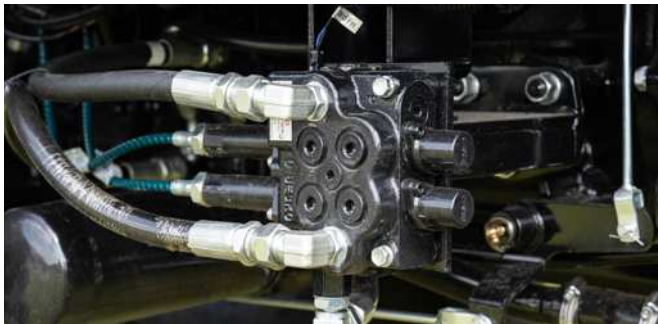

3rd function hydraulic valve to enhance attachment capabilities

Allowing for versatile implement handling, this tractor comes ready with a 3rd function installation kit. It can maximize the use of a bucket implement with 4-in-1 functionality, including lifting, tilting, dumping and grappling



Easy maintenance and service

The hood of the tractor can be easily opened, allowing quick access to the engine and other systems for routine service and maintenance. This feature help increase the tractor's durability and performance over time.

T495

A powerfully versatile compact tractor that gives you the best of both worlds



1. Cruise control switch



2. Projection headlights



3. 4-port rear hydraulic valve

Key specifications:

Engine power
45.3 hp | 34 kW

Engine manufacturer
TYM T2300N3

Lift capacity
1733 kg | 3822 lb

PTO power

**Mechanical: 36.3 hp | 27.2 kW
 HST: 33.5 hp | 25.1 kW**



4. 3-range HST & 8F
× 8R gear
transmission



5. PTO switch



6. Digital instrument
pane

T455

A compact tractor that sets new standards in performance



1. PTO cruise control



2. Projection head lamps



3. 2 sets of rear remote valves



4. Independent rear PTO switch



5. Foldable ROPS or all-season cab



6. Joystick control for optional front-end loader

Key specifications:

Engine power
46.6 hp | 34.3 kW

Engine manufacturer
Yanmar 4TNV88C-K

Lift capacity
1503 kg | 3314 lb

PTO power
33.5 hp | 25.1 kW



5025C

A high-performance compact tractor built to take on challenges of all sizes



1. Hood design



2. Comfortable suspension seat



3. Ergonomic lever



4. Highly responsive forward & reverse HST (5025CH)



5. High-capacity fuel tank



6. Joystick control for front-end loader

Key specifications:

Engine power
48 hp | 36 kW

Engine manufacturer
TYM T2300N2

Lift capacity
1456 kg | 3210 lb

PTO power
41.3 hp | 31 kW



5025

A high-performance compact tractor built to take on challenges of all sizes



1. Hood design



2. Comfortable suspension seat



3. Ergonomic lever



4. Rear work light



5. High-capacity fuel tank



6. Joystick control for front-end loader

Key specifications:

Engine power	Engine manufacturer	Lift capacity	PTO power
48 hp 36 kW	TYM T2300N2	1456 kg 3210 lb	41.3 hp 31 kW



5825

A high-performance compact tractor built to take on challenges of all sizes



1. Hood design



2. Comfortable suspension seat



3. Ergonomic lever



4. Rear work light



5. High-capacity fuel tank



6. Joystick control for front-end loader

Key specifications:

Engine power
54.3 hp | 40 kW

Engine manufacturer
TYM T2300T3

Lift capacity
1500 kg | 3307 lb

PTO power
47.4 hp | 34.9 kW



T575

A powerfully versatile compact tractor that gives you the best of both worlds



1. Cruise control switch



2. Projection headlights



3. 4-port rear hydraulic valve

Key specifications:

Engine power

55 hp | 41 kW

Engine manufacturer

TYM T2300T3

Lift capacity

1733 kg | 3822 lb

PTO power

**Mechanical: 45.6 hp | 34.2 kW
 HST: 42.4 hp | 31.8 kW**



4. 3-range hydrostatic transmission




5. PTO switch



6. Digital instrument panel

T555

A compact tractor that sets new standards in performance



1. PTO cruise control



2. Projection head lamps



3. 2 sets of rear remote valves



4. Independent rear PTO switch



5. Foldable ROPS or all-season cab



6. Joystick control for optional front-end loader

Key specifications:

Engine power
55.1 hp | 41.1 kW

Engine manufacturer
Yanmar 4TNV86CT-K

Lift capacity
1503 kg | 3314 lb

PTO power
33.5 hp | 25.1 kW



6225C

A high-performance compact tractor built to take on challenges of all sizes



1. Hood design



2. Comfortable suspension seat



3. Ergonomic lever



4. Highly responsive forward & reverse HST (6225CH)



5. High-capacity fuel tank



6. Joystick control for front-end loader

Key specifications:

Engine power
57.3 hp | 43 kW

Engine manufacturer
TYM T2300T3

Lift capacity
1456 kg | 3210 lb

PTO power
52.9 hp | 39.7 kW



6225


A high-performance compact tractor built to take on challenges of all sizes



1. Hood design



2. Comfortable suspension seat



3. Ergonomic lever



4. Rear work light



5. High-capacity fuel tank



6. Joystick control for front-end loader

Key specifications:

Engine power
57.3 hp | 43 kW

Engine manufacturer
TYM T2300T3

Lift capacity
1456 kg | 3210 lb

PTO power
52.9 hp | 39.7 kW



Specification Guide

MODEL	T495	T455	5025C	5025
ENGINE				
Engine manufacturer	TYM T2300N3	Yanmar 4TNV88C-K	TYM T2300N2	TYM T2300N2
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	45.3 hp 34 kW	46.6 hp 34.3 kW	48 hp 36 kW	48 hp 36 kW
PTO power	Mechanical: 36.3 hp 27.2 kW HST: 33.5 hp 25.1 kW	33.5 hp 25.1 kW	41.3 hp 31 kW	41.3 hp 31 kW
Rated engine speed	2600 rpm	2800 rpm	2600 rpm	2600 rpm
No. of cylinders	4	4	4	4
Displacement	2286 cc 139.5 cu. in.	2190 cc 133.6 cu. in.	2286 cc 139.5 cu. in.	2287 cc 139.5 cu. in.
Air cleaner	Single dry	Dual dry	Dry element	Dry element
Alternator	12V, 50A	12V, 70A	12V, 50A	12V, 50A
Fuel system	IDI	CRDI	Water-cooled diesel	Water-cooled diesel
POWERTRAIN				
Transmission type	Synchro-shuttle / HST	Synchro-shuttle / HST	Synchro-shuttle	5025R: Synchro-shuttle 5025H: HST
No. of speeds	SS: F8 x R8 HST: 3-range	SS: F16 x R16 HST: 3-range	5025C: F12 x R12 5025CH: 3-Range	5025R: F12 x R12 5025H: 3-Range
Max. traveling speed	Mechanical: 25.8 km/h 16.0 mph HST: 24.3 km/h 15.1mph	Mechanical: 29.6 km/h 18.4 mph HST: 29.4 km/h 18.3 mph	5025C: 28.8 km/h 17.9 mph 5025CH: 28.7 km/h 17.8 mph	5025R: 28.8 km/h 17.9 mph 5025H: 28.7 km/h 17.8 mph
Brakes	Wet disc	Wet disc	Wet, Multi disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry single plate	Dry single plate	Dry single plate N/A	Dry single plate N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Gear pump	Gear pump
Implement flow	29 L/min 7.7 gpm	35.7 L/min 9.5 gpm	43.2 L/min 11.4 gpm	43.2 L/min 11.4 gpm
Steering flow	17.8 L/min 4.3 gpm	17.3 L/min 4.6 gpm	19.4 L/min 5.2 gpm	19.4 L/min 5.2 gpm
Total flow	46.8 L/min 11.9 gpm	53.0 L/min 14.1 gpm	62.6 L/min 16.5 gpm	62.6 L/min 16.5 gpm
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	1733 kg 3822 lb	1503 kg 3314 lb	1456 kg 3210 lb	1456 kg 3210 lb
Hitch lift capacity at 24 inches behind link ends	1384 kg 3050.6 lb	1336 kg 2945 lb	937 kg 2066 lb	937 kg 2066 lb
Lift control type	Position/Draft	Position/Draft	Position/Draft	Position/Draft
No. of standard remote valves	2	2	4/4	4/4
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Electric/Hydro	Electric/Hydro	Electric/Hydro	Electric/Hydro
PTO rear	540 rpm	540/1000 rpm	540/540E rpm	540/540E rpm
CAPACITIES				
Fuel tank	60 L 17.0 gal	60 L 17.0 gal	45 L 11.9 gal	45 L 11.9 gal
Coolant	6.5 L 6.9 qt	8.5 L 9 qt	7.9 L 8.3 qt	7.9 L 8.3 qt
Crankcase	6.4 L 6.8 qt	6.7 L 7.1 qt	4.5 L 4.7 qt	4.5 L 4.7 qt
Transmission/Hydraulics system	34.8 L 9.2 gal	34.8 L 9.2 gal	5025C: 39 L 10.3 gal 5025CH: 42 L 11.1 gal	5025R: 39 L 10.3 gal 5025H: 42 L 11.1 gal
Front axle	9.9 L 10.5 qt	9.9 L 10.5 qt	6.4 L 6.8 qt	6.4 L 6.8 qt
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	3930 mm 154.7 in.	3929 mm 154.7 in.	3421 mm 134.3 in.	3421 mm 134.3 in.
Overall width	1800 mm 70.8 in.	1837 mm 72.3 in.	1814 mm 71.4 in.	1814 mm 71.4 in.
Wheelbase	1935 mm 76.2 in.	1935 mm 76.2 in.	1806 mm 71.1 in.	1806 mm 71.1 in.
Height to top of ROPS	2560 mm 100.7 in.	2590 mm 116.1 in.	-	5025R: 2500 mm 98.4 in. 5025H: 2463 mm 97.0 in.
Height to top of cabin	2390 mm 94.1 in.	2475 mm 97.4 in.	5025C: 2500 mm 98.4 in. 5025CH: 2463 mm 97.0 in.	-
Min. ground clearance	580 mm 22.8 in.	321 mm 12.6 in.	391 mm 15.4 in.	391 mm 15.4 in.
Min. turn radius with brakes	3080 mm 121.2 in.	3352 mm 131.9 in.	2390 mm 94.1 in.	2390 mm 94.1 in.
Min. turn radius without brakes	3340 mm 131.5 in.	3820 mm 150.4 in.	2850 mm 112.2 in.	2850 mm 112.2 in.
Weight with ROPS	1875 kg 4133.7 lb	1875 kg 4133.7 lb	-	5025R: 1795 kg 3957.3 lb 5025H: 1802 kg 3972.7 lb

MODEL	T495	T455	5025C	5025
Weight with cab	1975 kg 4354.1 lb	1975 kg 4354.1 lb	5025C: 2030 kg 4475.4 lb 5025CH: 2026 kg 4466.6 lb	-
STANDARD TIRES				
R1 Agricultural - Front	9.5-16 6PR	1: 9.5-16 6PR 2: 240/70 R16 3: 260/70 R16 4: 260/70 R16 5: 280/70 R16 6: 280/70 R16	1: 7-16 6PR 2: 8-16 4PR 3: 8-18 8PR 4: 9.5-16 6PR	1: 7-16 6PR 2: 8-16 4PR 3: 8-18 8PR 4: 9.5-16 6PR
R1 Agricultural - Rear	13.6-26 8PR	1: 13.6-26 8PR 2: 320/70 R24 3: 320/85 R24 4: 340/85 R24 5: 380/85 R24 6: 360/70 R28	1: 12.4-24 6PR 2: 13.6-24 8PR 3: 13.6-24 8PR 4: 13.6-26 8PR	1: 12.4-24 6PR 2: 13.6-24 8PR 3: 13.6-24 8PR 4: 13.6-26 8PR
R3 Turf - Front	12-16.5 10PR	12-16.5 10PR	1: 27x8.5x15 2: 29x12.5-15	1: 27x8.5x15 2: 29x12.5-15
R3 Turf - Rear	17.5L-24 8PR	17.5Lx24 8PR	1: 41x14x20 2: 44x18x20	1: 41x14x20 2: 44x18x20
R4 Industrial - Front	305/70-16.5	305/70-16.5	1: 305/70-16 2: 265/70-16.5 3: 200/70R16 4: 200/70R16 5: 200/70R16 6: 240/70R16 7: 240/70R16 8: 240/70R16 9: 240/70R16 10: 260/70R16 11: 260/70R16 12: 260/70R16 13: 260/70R16 14: 280/70R16 15: 280/70R18 16: 280/70R18	1: 305/70-16 2: 265/70-16.5 3: 200/70R16 4: 200/70R16 5: 200/70R16 6: 240/70R16 7: 240/70R16 8: 240/70R16 9: 240/70R16 10: 260/70R16 11: 260/70R16 12: 260/70R16 13: 260/70R16 14: 280/70R16 15: 280/70R18 16: 280/70R18
R4 Industrial - Rear	17.5L-24 6PR	17.5Lx24 6PR	1: 17.5L24 6PR 2: 420/70R24 3: 320/70R20 4: 320/70R24 5: 320/85R24 6: 340/85R24 7: 320/70R20 8: 320/85R24 9: 360/70R20 10: 340/85R24 11: 360/70R20 12: 360/70R24 13: 380/70R20 14: 380/70R24 15: 380/70R24 16: 380/70R28	1: 17.5L24 6PR 2: 420/70R24 3: 320/70R20 4: 320/70R24 5: 320/85R24 6: 340/85R24 7: 320/70R20 8: 320/85R24 9: 360/70R20 10: 340/85R24 11: 360/70R20 12: 360/70R24 13: 380/70R20 14: 380/70R24 15: 380/70R24 16: 380/70R28

Specification Guide

MODEL	5825	T575	T555	6225C
ENGINE				
Engine manufacturer	TYM T2300T3	TYM T2300T3	Yanmar 4TNV86CT-K	TYM T2300T3
Type	Turbo Charger	Turbo	Turbo	Turbo
Engine power	54.3 hp 40 kW	55 hp 41 kW	55.1 hp 41.1 kW	57.3 hp 43 kW
PTO power	47.4 hp 34.9 kW	Mechanical: 45.6 hp 34.2 kW HST: 42.4 hp 31.8 kW	33.5 hp 25.1 kW	52.9 hp 39.7 kW
Rated engine speed	2600 rpm	2600 rpm	2800 rpm	2600 rpm
No. of cylinders	4	4	4	4
Displacement	2287 cc 139.5 cu. in.	2286 cc 139.5 cu. in.	2091 cc 127.6 cu. in.	2287 cc 139.5 cu. in.
Air cleaner	Dry type, Double element	Dual dry	Dual dry	Dry element
Alternator	12V, 50A	12V, 50A	12V, 70A	12V, 50A
Fuel system	Water-cooled diesel	IDI	CRDI	Water-cooled diesel
POWERTRAIN				
Transmission type	Synchromesh	Synchro-shuttle / HST	Synchro-shuttle / HST	6225C: Synchro-shuttle 6225CH: HST
No. of speeds	F12 x R12	SS: F8 x R8 HST: 3-range	SS: F16 x R16 HST: 3-range	6225C: F12 x R12 6225CH: 3-Range
Max. traveling speed	30.3 km/h 18.8 mph	Mechanical: 25.8 km/h 16.0 mph HST: 24.3 km/h 15.1 mph	Mechanical: 29.6 km/h 18.4 mph HST: 29.4 km/h 18.3 mph	6225C: 28.8 km/h 17.9 mph 6225CH: 28.7 km/h 17.8 mph
Brakes	Wet disc	Wet disc	Wet disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry type, double element	Dry single plate	Dry single plate	Dry single plate N/A
HYDRAULIC SYSTEM				
Pump type	Gear pump	Dual gear pump	Dual gear pump	Gear pump
Implement flow	40.5 L/min 10.7 gpm	29 L/min 7.7 gpm	35.9 L/min 9.5 gpm	43.2 L/min 11.4 gpm
Steering flow	18.9 L/min 5 gpm	17.8 L/min 4.3 gpm	17.3 L/min 4.6 gpm	19.4 L/min 5.2 gpm
Total flow	59.4 L/min 15.7 gpm	46.8 L/min 11.9 gpm	52.9 L/min 14.1 gpm	62.6 L/min 16.5 gpm
Category, 3-point hitch	II	I	I	II
Hitch lift capacity	1500 kg 3307 lb	1733 kg 3822 lb	1503 kg 3314 lb	1456 kg 3210 lb
Hitch lift capacity at 24 inches behind link ends	1100 kg 2425 lb	1384 kg 3050.6 lb	1336 kg 2945 lb	937 kg 2066 lb
Lift control type	Position	Position/Draft	Position/Draft	Position/Draft
No. of standard remote valves	4/4	2	2	4/4
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Electric/Hydro	Electric/Hydro	Electric/Hydro	Electric/Hydro
PTO rear	540/540E rpm	540 rpm	540/1000 rpm	540/540E rpm
CAPACITIES				
Fuel tank	45 L 11.9 gal	60 L 17.0 gal	60 L 17.0 gal	45 L 11.9 gal
Coolant	7.9 L 8.4 qt	6.5 L 6.9 qt	8.5 L 9 qt	7.9 L 8.3 qt
Crankcase	4.5 L 4.8 qt	6.4 L 6.8 qt	6.7 L 7.1 qt	4.5 L 4.7 qt
Transmission/Hydraulics system	42 L 11.1 gal	34.8 L 9.2 gal	34.8 L 9.2 gal	6225C: 39 L 10.3 gal 6225CH: 42 L 11.1 gal
Front axle	7.2 L 7.6 qt	9.9 L 10.5 qt	9.9 L 10.5 qt	6.4 L 6.8 qt
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	3500 mm 137.8 in.	3930 mm 154.7 in.	3929 mm 154.7 in.	3421 mm 134.3 in.
Overall width	1500 mm 59.1 in.	1800 mm 70.8 in.	1837 mm 72.3 in.	1814 mm 71.4 in.
Wheelbase	1820 mm 71.7 in.	1935 mm 76.2 in.	1935 mm 76.2 in.	1806 mm 71.1 in.
Height to top of ROPS	2520 mm 99.2 in.	2560 mm 100.7 in.	2590 mm 116.1 in.	-
Height to top of cabin	-	2390 mm 94.1 in.	2475 mm 97.4 in.	-- -
Min. ground clearance	335 mm 13.2 in.	580 mm 22.8 in.	321 mm 12.6 in.	391 mm 15.4 in.
Min. turn radius with brakes	2907 mm 114.4 in.	3080 mm 121.2 in.	3352 mm 131.9 in.	2390 mm 94.1 in.
Min. turn radius without brakes	3387 mm 133.3 in.	3340 mm 131.5 in.	3820 mm 150.4 in.	2850 mm 112.2 in.
Weight with ROPS	1720 kg 3792 lb	1875 kg 4133.7 lb	1875 kg 4133.7 lb	- -
Weight with cab	-	1975 kg 4354.1 lb	1975 kg 4354.1 lb	2030 kg 4475.4 lb
STANDARD TIRES				

MODEL	5825	T575	T555	6225C
R1 Agricultural - Front	9.5-16	9.5-16 6PR	1: 9.5-16 6PR 2: 240/70 R16 3: 260/70 R16 4: 260/70 R16 5: 280/70 R16 6: 280/70 R16	1: 7-16 6PR 2: 8-16 4PR 3: 8-18 8PR 4: 9.5-16 6PR
R1 Agricultural - Rear	13.6-26	13.6-26 8PR	1: 13.6-26 8PR 2: 320/70 R24 3: 320/85 R24 4: 340/85 R24 5: 380/85 R24 6: 360/70 R28	1: 12.4-24 6PR 2: 13.6-24 8PR 3: 13.6-24 8PR 4: 13.6-26 8PR
R3 Turf - Front		12-16.5 10PR	12-16.5 10PR	1: 27x8.5x15 2: 29x12.5-15
R3 Turf - Rear		17.5L-24 8PR	17.5Lx24 8PR	1: 41x14x20 2: 44x18x20
R4 Industrial - Front		305/70-16.5	17.5Lx24 8PR	1: 305/70-16 2: 265/70-16.5 3: 200/70R16 4: 200/70R16 5: 200/70R16 6: 240/70R16 7: 240/70R16 8: 240/70R16 9: 240/70R16 10: 260/70R16 11: 260/70R16 12: 260/70R16 13: 260/70R16 14: 280/70R16 15: 280/70R18 16: 280/70R18
R4 Industrial - Rear		17.5L-24 6PR	17.5Lx24	1: 17.5L24 6PR 2: 420/70R24 3: 320/70R20 4: 320/70R24 5: 320/85R24 6: 340/85R24 7: 320/70R20 8: 320/85R24 9: 360/70R20 10: 340/85R24 11: 360/70R20 12: 360/70R24 13: 380/70R20 14: 380/70R24 15: 380/70R24 16: 380/70R28

Specification Guide

MODEL	6225
ENGINE	
Engine manufacturer	TYM T2300T3
Type	Turbo
Engine power	57.3 hp 43 kW
PTO power	52.9 hp 39.7 kW
Rated engine speed	2600 rpm
No. of cylinders	4
Displacement	2287 cc 139.5 cu. in.
Air cleaner	Dry element
Alternator	12V, 50A
Fuel system	Water-cooled diesel
POWERTRAIN	
Transmission type	6225R: Synchro-shuttle 6225H: HST
No. of speeds	6225R: F12 x R12 6225H: 3-Range
Max. traveling speed	6225R: 28.8 km/h 17.9 mph 6225H: 28.7 km/h 17.8 mph
Brakes	Wet, Multi disc
Steering	Hydrostatic
Clutch	Dry single plate N/A
HYDRAULIC SYSTEM	
Pump type	Gear pump
Implement flow	43.2 L/min 11.4 gpm
Steering flow	19.4 L/min 5.2 gpm
Total flow	62.6 L/min 16.5 gpm
Category, 3-point hitch	II
Hitch lift capacity	1456 kg 3210 lb
Hitch lift capacity at 24 inches behind link ends	937 kg 2066 lb
Lift control type	Position/Draft
No. of standard remote valves	4/4
PTO	
PTO type	Independent
PTO control	Electric/Hydro
PTO rear	540/540E rpm
CAPACITIES	
Fuel tank	45 L 11.9 gal
Coolant	7.9 L 8.3 qt
Crankcase	4.5 L 4.7 qt
Transmission/Hydraulics system	6225R: 39 L 10.3 gal 6225H: 42 L 11.1 gal
Front axle	6.4 L 6.8 qt
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	3421 mm 134.3 in.
Overall width	1814 mm 71.4 in.
Wheelbase	1806 mm 71.1 in.
Height to top of ROPS	6225R: 2500 mm 98.4 in. 6225H: 2463 mm 97.0 in.
Height to top of cabin	-
Min. ground clearance	391 mm 15.4 in.
Min. turn radius with brakes	2390 mm 94.1 in.
Min. turn radius without brakes	2850 mm 112.2 in.
Weight with ROPS	6225R: 1795 kg 3957.3 lb 6225H: 1802 kg 3972.7 lb
Weight with cab	-
STANDARD TIRES	

MODEL	6225
R1 Agricultural - Front	1: 7-16 6PR 2: 8-16 4PR 3: 8-18 8PR 4: 9.5-16 6PR
R1 Agricultural - Rear	1: 12.4-24 6PR 2: 13.6-24 8PR 3: 13.6-24 8PR 4: 13.6-26 8PR
R3 Turf - Front	1: 27x8.5x15 2: 29x12.5-15
R3 Turf - Rear	1: 41x14x20 2: 44x18x20
R4 Industrial - Front	1: 305/70-16 2: 265/70-16.5 3: 200/70R16 4: 200/70R16 5: 200/70R16 6: 240/70R16 7: 240/70R16 8: 240/70R16 9: 240/70R16 10: 260/70R16 11: 260/70R16 12: 260/70R16 13: 260/70R16 14: 280/70R16 15: 280/70R18 16: 280/70R18
R4 Industrial - Rear	1: 17.5L24 6PR 2: 420/70R24 3: 320/70R20 4: 320/70R24 5: 320/85R24 6: 340/85R24 7: 320/70R20 8: 320/85R24 9: 360/70R20 10: 340/85R24 11: 360/70R20 12: 360/70R24 13: 380/70R20 14: 380/70R24 15: 380/70R24 16: 380/70R28



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world