

2026 Catalog

Series 3

Compact Tractors

24 - 48.3 hp



For distribution and sales in North American territories

Series 3 Compact Tractors

The Series 3 tractors are equipped to take on bigger tasks in smaller spaces. These tractors deliver resilience and efficiency through streamlined design and high maneuverability.

Perfect for navigating low-ceiling areas with ease, the Series 3 tractors are primed to handle jobs of all sizes.



2515

Engine power 24 hp **Lift capacity** 1500 kg



T3025C

Engine power 24 hp **Lift capacity** 1500 kg



T3025

Engine power 24 hp **Lift capacity** 1500 kg



3015

Engine power 30 hp **Lift capacity** 1500 kg



3515

Engine power 35 hp **Lift capacity** 1500 kg



3515C

Engine power 35 hp **Lift capacity** 1500 kg



T3035

Engine power 35 hp **Lift capacity** 1500 kg



T3035C

Engine power 35 hp **Lift capacity** 1500 kg

Series 3

Compact Tractors



T394

Engine power 37.4 hp Lift capacity 1197 kg



T394C

Engine power 37.4 hp Lift capacity 1197 kg



4215

Engine power 41 hp Lift capacity 1500 kg



4215C

Engine power 41 hp Lift capacity 1500 kg



4815

Engine power 48 hp Lift capacity 1500 kg



4815C

Engine power 48 hp Lift capacity 1500 kg



T474

Engine power 48.3 hp Lift capacity 1220 kg



T474C

Engine power 48.3 hp Lift capacity 1220 kg

Engineered for enhanced productivity and maneuverability

Engineered for productivity inside and out, the Series 3 tractors are ruggedly built and packed with features to minimize operator effort. These tractors come standard with sturdy cast iron linkages and easy to operate hydrostatic controls.

Good clearance from the ground and overhead makes it easier to work on uneven terrain or within structures. With high engine efficiency, impressive lift capabilities, and the option of a foldable ROPS or heated cabin, the Series 3 tractors are ideal for light-to-medium duty jobs, all year round.

Most popular applications



Arable Farming




Construction



Snow Clearing



Landscaping

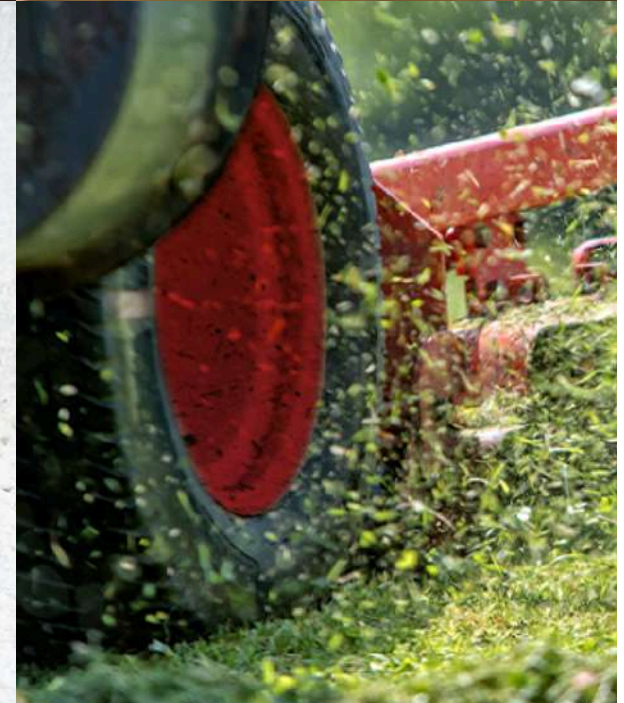

All the right features to get the job done



Eco-friendly TYM Tier 4 engine

Equipped with a naturally aspirated engine designed and manufactured by TYM, the tractor is designed to be eco-friendly and fuel-efficient without compromising on performance.



Tilt steering wheel

The tilt steering wheel allows operators to adjust the position of the steering wheel for a more comfortable driving experience.



PTO on/off switch

Safety is a top priority. The PTO switch ensures secure operation of all tractor attachments.



LED work light (optional)

Full front and rear LED work lights facilitate safer operations, particularly in low visibility conditions such as rainy or dusty work environments, or during nighttime tasks.



Differential lock system and low turning angle

The differential lock system, activated with easily accessible levers, provides enhanced traction in slippery work environments, while a 52° turning angle makes operation in narrow areas much easier.



Water-separating fuel filter

The water-separating fuel filter prevents foreign substances from entering the fuel, ensuring better engine starting performance and preventing damage to the machine.

2515

A compact tractor robust enough to take on challenges of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3306 lb | 1500 kg

PTO power
21 hp | 15.7 kW



4. Responsive forward/reverse HST (2515H)



5. High-capacity fuel tank



6. High visibility instrumental panel

T3025C

A compact tractor robust enough to take on challenges of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. LED light (Standard)

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3306 lb | 1500 kg

PTO power
21 hp | 15.7 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. LED light (Standard)

T3025

A robust compact tractor fit for challenges of all sizes




1. New iconic hood



2. Comfortable suspension seat



3. Toolbox



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3307 lb | 1500 kg

PTO power
21 hp | 15.7 kW



3015

A compact tractor robust enough to take on challenges of all sizes




1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST (3015H)



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
30 hp | 22.5 kW

Engine manufacturer
TYM T1700N3

Lift capacity
3306 lb | 1500 kg

PTO power
25 hp | 18.7 kW

3515

A compact tractor that excels in performance and delivers results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST (3515H)



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
35 hp | 26.2 kW

Engine manufacturer
TYM T1700N2

Lift capacity
3306 lb | 1500 kg

PTO power
30 hp | 22.4 kW

3515C

A compact tractor that excels in performance and delivers results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
35 hp | 26.2 kW

Engine manufacturer
TYM T1700N2

Lift capacity
3306 lb | 1500 kg

PTO power
30 hp | 22.5 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. Front-end loader joystick lever

T3035

A robust compact tractor fit for challenges of all sizes




1. New iconic hood



2. Comfortable suspension seat



3. Toolbox



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
35 hp | 26.2 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3307 lb | 1500 kg

PTO power
30 hp | 22.4 kW



T3035C

A compact tractor robust enough to take on challenges of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST



5. Defrost and A/C vents



6. LED light (Standard)

Key specifications:

Engine power
35 hp | 26.2 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3306 lb | 1500 kg

PTO power
30 hp | 22.4 kW



4. Responsive forward/reverse HST



5. Defrost and A/C vents



6. LED light (Standard)

T394

A compact tractor that outperforms its size and outsmarts limitations



1. Optional loader with high lift capacity



2. PTO on/off switch



3. Dual filter air cleaner



4. Optional cruise control with kit



5. Foldable ROPS



6. Joystick control for front loader

Key specifications:

Engine power
37.4 hp | 27.5 kW

Engine manufacturer
Yanmar 3TNV88-CR

Lift capacity
2639 lb | 1197 kg

PTO power
30.2 hp | 22.5 kW



T394C

A compact tractor that outperforms its size and outsmarts limitations



1. Optional loader with high lift capacity



2. PTO on/off switch



3. Dual filter air cleaner



4. Cruise control



5. Cabin with heating and AC



6. Joystick control for front-end loader

Key specifications:

Engine power
37.4 hp | 27.5 kW

Engine manufacturer
Yanmar 3TNV88-CR

Lift capacity
2639 lb | 1197 kg

PTO power
30 hp | 22.5 kW



4215

Compact tractor blending versatility and power for unmatched results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever


Key specifications:

Engine power
41 hp | 30.6 kW

Engine manufacturer
TYM T2000N2

Lift capacity
3306 lb | 1500 kg

PTO power
36 hp | 26.9 kW



4. Responsive forward/reverse HST (4215H)



5. High-capacity fuel tank



6. High visibility instrumental panel

4215C

A compact tractor that blends versatility with power for unmatched results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
41 hp | 30.6 kW

Engine manufacturer
TYM T2000N2

Lift capacity
3306 lb | 1500 kg

PTO power
36 hp | 26.9 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. Front-end loader joystick lever

4815

A compact tractor that outperforms its size for every task




1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST (4815H)



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
48 hp | 35.8 kW

Engine manufacturer
TYM T2300N2

Lift capacity
3306 lb | 1500 kg

PTO power
40 hp | 30.7 kW

4815C

A compact tractor that outperforms its size for every task



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
48 hp | 35.8 kW

Engine manufacturer
TYM T2300N2

Lift capacity
3306 lb | 1500 kg

PTO power
40 hp | 30.7 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. Front-end loader joystick lever

T474

A powerful compact tractor that helps you push the limits



1. Auto throttle



2. Auto PTO lever



3. Cruise control

Key specifications:

Engine power
48.3 hp | 36 kW

Engine manufacturer
TYM T2300N2

Lift capacity
2689.6 lb | 1220 kg

PTO power
35.9 hp | 26.4 kW



4. Foldable ROPS



5. Single rear
attachment control



6. Shuttle
transmission

T474C

A powerful compact tractor that helps you push the limits



1. Auto throttle



2. Auto PTO lever



3. Cruise control

Key specifications:

Engine power
48.3 hp | 36 kW

Engine manufacturer
TYM T2300N2

Lift capacity
2689.6 lb | 1220 kg

PTO power
35.9 hp | 26.4 kW



4. Cabin with heating and AC



5. Single rear attachment control



6. Shuttle transmission

Specification Guide

MODEL	2515	T3025C	T3025	3015
ENGINE				
Engine manufacturer	TYM T1700N6	TYM T1700N6	TYM T1700N6	TYM T1700N3
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	24 hp 18 kW	24 hp 18 kW	24 hp 18 kW	30 hp 22.5 kW
PTO power	21 hp 15.7 kW	21 hp 15.7 kW	21 hp 15.7 kW	25 hp 18.7 kW
Rated engine speed	2100 rpm	2100 rpm	2100 rpm	2600 rpm
No. of cylinders	3	3	3	3
Displacement	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc
Air cleaner	Dry element	Dry element	Dry element	Dry element
Alternator	12V, 50A	12V, 70A	12V, 50A	12V, 50A
Fuel system	IDI	IDI	IDI	IDI
POWERTRAIN				
Transmission type	2515R: Synchromesh 2515H: HST	HST	T3025R: Synchromesh T3025H: HST	3015R: Synchromesh 3015H: HST
No. of speeds	2515R: F12 x R12 2515H: 3-Range	3-Range	T3025R: F12 x F12 T3025H: 3-Range	3015R: F12 x R12 3015H: 3-Range
Max. traveling speed	2515R: 11.7 mph 18.8 km/h 2515H: 15.2 mph 24.4 km/h	14.6 mph 23.6 km/h	T3025R: 11.7 mph 18.8 km/h T3025H: 16.7 mph 26.8 km/h	3015R: 14.4 mph 23.2 km/h 3015H: 18.8 mph 30.2 km/h
Brakes	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry single plate / N/A	N/A	Dry single plate / N/A	Dry single plate / N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	7.7 gpm 29.3 L/min	7.7 gpm 29.3 L/min	7.5 gpm 28.4 L/min	7.7 gpm 29.3 L/min
Steering flow	4.2 gpm 15.8 L/min	4.2 gpm 15.8 L/min	4.0 gpm 15.1 L/min	4.2 gpm 15.8 L/min
Total flow	11.9 gpm 45.1 L/min	11.9 gpm 45.1 L/min	11.5 gpm 43.5 L/min	11.9 gpm 45.1 L/min
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	3306 lb 1500 kg	3306 lb 1500 kg	3307 lb 1500 kg	3306 lb 1500 kg
Hitch lift capacity at 24 inches behind link ends	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Loader: 2 / Rear: 0	Loader: 4 / Rear: 0	Loader: 4 / Rear: 0 (Optional, up to 4)	Loader: 2 / Rear: 0
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Wet/Multi disc	Wet/Multi disc	Electric/Hydro	Wet/Multi disc
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	7.1 gal 27 L	7.1 gal 27 L	8.7 gal 33 L	7.1 gal 27 L
Coolant	5.3 qt 5 L	5.3 qt 5 L	5.3 qt 5 L	5.3 qt 5 L
Crankcase	4.5 qt 4.3 L	4.5 qt 4.3 L	4.5 qt 4.3 L	4.5 qt 4.3 L
Transmission/Hydraulics system	2515R: 9 gal 34 L 2515H: 9.8 gal 37 L	9.8 gal 37 L	8.9 gal 34 L (Synchro) 9.8 gal 37 L (HST)	3015R: 9 gal 34 L 3015H: 9.8 gal 37 L
Front axle	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	120.9 in. 3071 mm	120.9 in. 3071 mm	121 in. 3071 mm	120.9 in. 3071 mm
Overall width	56.3 in. 1430 mm	56.6 in. 1413 mm	56.3 in. 1430 mm	56.3 in. 1430 mm
Wheelbase	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm
Height to top of ROPS	97.3 in. 2471 mm	-	97.2 in. 2471 mm	97.3 in. 2471 mm
Height to top of cabin	-	89.3 in. 2267 mm	-	-
Min. ground clearance	14.4 in. 366 mm	13.1 in. 334 mm	14.4 in. 366 mm	14.4 in. 366 mm
Min. turn radius with brakes	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 105.51 in. 2680 mm / (R) 104.72 in. 2660 mm	-	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm
Min. turn radius without brakes	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 105.51 in. 2680 mm / (R) 104.72 in. 2660 mm	105.5 in. / 2680 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm
Weight with ROPS	2515R: 1356 kg 2989 lb 2515H: 1347 kg 2969 lb	-	1347 kg 2969.6 lb	3015R: 3183 lb 1444 kg 3015H: 3163 lb 1435 kg
Weight with cab	-	3313 lb 1503 kg	-	-

MODEL	2515	T3025C	T3025	3015
STANDARD TIRES				
R1 Agricultural - Front	8-16	7-16, 6PR	8-16	8-16
R1 Agricultural - Rear	12.4-24	11.2-24, 8PR	12.4-24	12.4-24
R3 Turf - Front	27x8.5-15, 6PR	-	27x8.5-15	27x8.5-15, 6PR
R3 Turf - Rear	41x14.00, 4PR	-	41x14.00	41x14.00, 4PR
R4 Industrial - Front	10-16.5, 6PR	25x8.5-14, 6PR	10-16.5	10-16.5, 6PR
R4 Industrial - Rear	420/70-24, 6PR	380/70-19.5, 6PR	420/70-24	420/70-24, 6PR

Specification Guide

MODEL	3515	3515C	T3035	T3035C
ENGINE				
Engine manufacturer	TYM T1700N2	TYM T1700N2	TYM T1700N6	TYM T1700N6
Type	3515R: Synchromesh 3515H: HST	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	35 hp 26.2 kW	35 hp 26.2 kW	35 hp 26.2 kW	35 hp 26.2 kW
PTO power	30 hp 22.4 kW	30 hp 22.5 kW	30 hp 22.4 kW	30 hp 22.4 kW
Rated engine speed	2600 rpm	2600 rpm	2100 rpm	2100 rpm
No. of cylinders	3	3	3	3
Displacement	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc	104.5 cu. in. 1744 cc	104.5 cu. in. 1744 cc
Air cleaner	Dry element	Dry element	Dry element	Dry element
Alternator	12V, 50A	12V, 70A	12V, 50A	12V, 70A
Fuel system	IDI	IDI	IDI	IDI
POWERTRAIN				
Transmission type	3515R: Synchromesh 3515H: HST	HST	T3035R: Synchromesh T3035H: HST	HST
No. of speeds	3515R: F12 x R12 3515H: 3-Range	3-Range	T3035R: F12 x F12 T3035H: 3-Range	3-Range
Max. traveling speed	3515R: 14.4 mph 23.2 km/h 3515H: 18.8 mph 30.2 km/h	18 mph 28.9 km/h	T3035R: 14.4 mph 23.2 km/h T3035H: 18.8 mph 30.2 km/h	18 mph 28.9 km/h
Brakes	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry single plate / N/A	N/A	T3035R: Dry single plate T3035H: N/A	N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	7.7 gpm 29.3 L/min	7.7 gpm 29.3 L/min	7.5 gpm 28.4 L/min	7.7 gpm 29.3 L/min
Steering flow	4.2 gpm 15.8 L/min	4.2 gpm 15.8 L/min	4.0 gpm 15.1 L/min	4.2 gpm 15.8 L/min
Total flow	11.9 gpm 45.1 L/min	11.9 gpm 45.1 L/min	11.5 gpm 43.5 L/min	11.9 gpm 45.1 L/min
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	3306 lb 1500 kg	3306 lb 1500 kg	3307 lb 1500 kg	3306 lb 1500 kg
Hitch lift capacity at 24 inches behind link ends	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Loader: 2 / Rear: 0	Loader: 4 / Rear: 0	Loader: 4 / Rear: 0 (Optional, up to 4)	Loader: 4 / Rear: 0
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Wet/Multi disc	Wet/Multi disc	Electric/Hydro	Wet/Multi disc
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	7.1 gal 27 L	7.1 gal 27 L	8.7 gal 33 L	7.1 gal 27 L
Coolant	5.3 qt 5 L	5.3 qt 5 L	5.3 qt 5 L	5.3 qt 5 L
Crankcase	4.5 qt 4.2 L	4.5 qt 4.2 L	4.5 qt 4.3 L	4.5 qt 4.3 L
Transmission/Hydraulics system	3515R: 9 gal 34 L 3515H: 9.8 gal 37 L	9.8 gal 37 L	8.9 gal 34 L (Synchro) 9.8 gal 37 L (HST)	9.8 gal 37 L
Front axle	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	120.9 in. 3071 mm	120.9 in. 3071 mm	120.9 in. 3071 mm	120.9 in. 3071 mm
Overall width	56.3 in. 1430 mm	55.6 in. 1430 mm	56.3 in. 1430 mm	56.3 in. 1430 mm
Wheelbase	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm
Height to top of ROPS	97.3 in. 2471 mm	-	97.3 in. 2471 mm	-
Height to top of cabin	-	97.3 in. 2471 mm	-	97.3 in. 2471 mm
Min. ground clearance	14.4 in. 366 mm	14.4 in. 366 mm	14.4 in. 366 mm	14.4 in. 366 mm
Min. turn radius with brakes	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	-	(L) 105.51 in. 2680 mm / (R) 104.72 in. 2660 mm
Min. turn radius without brakes	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	105.5 in. / 2680 mm	(L) 105.51 in. 2680 mm / (R) 104.72 in. 2660 mm

MODEL	3515	3515C	T3035	T3035C
Weight with ROPS	3515R: 3183 lb 1444 kg 3515H: 3163 lb 1435 kg	-	1347 kg 2969.6 lb	-
Weight with cab	-	3552 lb 1611 kg		3313 lb 1503 kg
STANDARD TIRES				
R1 Agricultural - Front	8-16	7-16	8-16	7-16, 6PR
R1 Agricultural - Rear	12.4-24	11.2-24	12.4-24	11.2-24, 8PR
R3 Turf - Front	27x8.5-15, 6PR	27x8.5-15, 6PR	27x8.5-15	-
R3 Turf - Rear	41x14.00, 4PR	41x14.00, 4PR	41x14.00	-
R4 Industrial - Front	10-16.5, 6PR	25x8.5-14, 6PR	10-16.5	25x8.5-14, 6PR
R4 Industrial - Rear	420/70-24, 6PR	380/70-19.5, 6PR	420/70-24	380/70-19.5, 6PR

Specification Guide

MODEL	T394	T394C	4215	4215C
ENGINE				
Engine manufacturer	Yanmar 3TNV88-CR	Yanmar 3TNV88-CR	TYM T2000N2	TYM T2000N2
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	37.4 hp 27.5 kW	37.4 hp 27.5 kW	41 hp 30.6 kW	41 hp 30.6 kW
PTO power	30.2 hp 22.5 kW	30 hp 22.5 kW	36 hp 26.9 kW	36 hp 26.9 kW
Rated engine speed	3000 rpm	3000 rpm	2600 rpm	2600 rpm
No. of cylinders	3	3	4	4
Displacement	100.2 cu. in. 1642 cc	100.2 cu. in. 1642 cc	139.5 cu. in. 2287 cc	139.5 cu. in. 2287 cc
Air cleaner	Dual dry	Dual dry	Dry element	Dry element
Alternator	12V, 50A	12V, 70A	12V, 50A	12V, 70A
Fuel system	CRDI	CRDI	IDI	IDI
POWERTRAIN				
Transmission type	Mechanical	Mechanical	4215R: Synchronesh 4215H: HST	HST
No. of speeds	F12xR12	F12xR12	4215R: F12 x R12 4215H: 3-Range	3-Range
Max. traveling speed	15.0 mph 24.2 km/h	15.0 mph 24.2 km/h	4215R: 14.4 mph 23.1 km/h 4215H: 18.8 mph 30.2 km/h	18 mph 28.9 km/h
Brakes	Wet disc	Wet disc	Wet, Multi disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry single plate	Dry single plate	Dry single plate NA	N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	6.1 gpm 23.2 L/min	6.1 gpm 23.2 L/min	11.4 gpm 43.2 L/min	11.4 gpm 43.2 L/min
Steering flow	4.4 gpm 16.7 L/min	4.4 gpm 16.7 L/min	5.2 gpm 19.4 L/min	5.2 gpm 19.4 L/min
Total flow	10.5 gpm 39.9 L/min	10.5 gpm 39.9 L/min	16.5 gpm 62.6 L/min	16.5 gpm 62.6 L/min
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	2639 lb 1197 kg	2639 lb 1197 kg	3306 lb 1500 kg	3306 lb 1500 kg
Hitch lift capacity at 24 inches behind link ends	1558 lb 707 kg	1558 lb 707 kg	2425 lb 1100 kg	2425 lb 1100 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Optional (1 or 2)	Optional (1 or 2)	Loader: 2 / Rear: 0	Loader: 2 / Rear: 0
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Electric/Hydro	Electric/Hydro	Wet/Multi disc	Wet/Multi disc
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	9.0 gal 34 L	9.0 gal 34 L	7.1 gal 27 L	7.1 gal 27 L
Coolant	7.4 qt 7 L	7.4 qt 7 L	5.8 qt 5.5 L	5.8 qt 5.5 L
Crankcase	6 qt 5.7 L	6 qt 5.7 L	4.8 qt 4.5 L	4.8 qt 4.5 L
Transmission/Hydraulics system	8.5 gal 32.2 L	8.5 gal 32.2 L	4215R: 9 gal 34 L 4215H: 9.8 gal 37 L	9.8 gal 37 L
Front axle	8.7 qt 8.2 L	8.7 qt 8.2 L	6.8 qt 6.4 L	6.8 qt 6.4 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	126 in. 3200 mm	126 in. 3200 mm	120.9 in. 3071 mm	120.9 in. 3071 mm
Overall width	53.5 in. 1360 mm	53.5 in. 1360 mm	56.3 in. 1430 mm	55.6 in. 1413 mm
Wheelbase	64.5 in. 1640 mm	66.9 in. 1700 mm	65.7 in. 1670 mm	65.7 in. 1670 mm
Height to top of ROPS	94.5 in. 2400 mm	-	97.3 in. 2471 mm	-
Height to top of cabin	-	92.5 in. 2350 mm	-	mm in. 2267 89.3
Min. ground clearance	12.8 in. 325 mm	12.8 in. 325 mm	14.4 in. 366 mm	13.1 in. 334 mm
Min. turn radius with brakes	94.4 in. 2400 mm	2400 in. 2400 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm
Min. turn radius without brakes	116 in. 2950 mm	116 in. 2950 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm
Weight with ROPS	3020 lb 1370 kg	-	4215R: 3278 lb 1487 kg 4215H: 3258 lb 1478 kg	-
Weight with cab	-	3417 lb 1550 kg	-	3644 lb 1653 kg
STANDARD TIRES				

MODEL	T394	T394C	4215	4215C
R1 Agricultural - Front	Farm Specialist 8.0-16 NHS TL 6PR	Farm Specialist 8.0-16 NHS TL 6PR	8-16	7-16
R1 Agricultural - Rear	Farm Specialist 12.4-24 NHS TL 6PR	Farm Specialist 12.4-24 NHS TL 6PR	12.4-24	11.2-24
R3 Turf - Front	27x10.5-15	27x10.5-15	27x8.5-15, 6PR	27x8.5-15, 6PR
R3 Turf - Rear	12.5-20	12.5-20	41x14.00, 4PR	41x14.00, 4PR
R4 Industrial - Front	27x10.5-15	27x10.5-15	10-16.5, 6PR	25x8.5-14, 6PR
R4 Industrial - Rear	12.5x20	12.5x20	420/70-24. 6PR	380/70-19.5, 6PR

Specification Guide

MODEL	4815	4815C	T474	T474C
ENGINE				
Engine manufacturer	TYM T2300N2	TYM T2300N2	TYM T2300N2	TYM T2300N2
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	48 hp 35.8 kW	48 hp 35.8 kW	48.3 hp 36 kW	48.3 hp 36 kW
PTO power	40 hp 30.7 kW	40 hp 30.7 kW	35.9 hp 26.4 kW	35.9 hp 26.4 kW
Rated engine speed	2600 rpm	2600 rpm	2600 rpm	2600 rpm
No. of cylinders	4	4	4	4
Displacement	139.5 cu. in. 2287 cc	139.5 cu. in. 2287 cc	139.5 cu. in. 2286 cc	139.5 cu. in. 2286 cc
Air cleaner	Dry element	Dry element	Single dry	Single dry
Alternator	12V, 50A	12V, 70A	12V, 70A	12V, 70A
Fuel system	IDI	IDI	IDI	IDI
POWERTRAIN				
Transmission type	4815R: Synchronesh 4815H: HST	HST	Mechanical	Mechanical
No. of speeds	4815R: 12F / 12R 4815H: 3-Range	3-Range	F12xR12	F12xR12
Max. traveling speed	4815R: 14.9 mph 24 km/h 4815H: 18.8 mph 30.2 km/h	18 mph 28.9 km/h	14.9 mph 24 km/h	14.9 mph 24 km/h
Brakes	Wet, Multi disc	Wet, Multi disc	Wet disc	Wet disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry single plate	N/A	Dry single plate	Dry single plate
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	11.4 gpm 43.2 L/min	11.4 gpm 43.2 L/min	7.7 gpm 29 L/min	7.7 gpm 29 L/min
Steering flow	5.2 gpm 19.4 L/min	5.2 gpm 19.4 L/min	4.2 gpm 16.1 L/min	4.2 gpm 16.1 L/min
Total flow	16.5 gpm 62.6 L/min	16.5 gpm 62.6 L/min	11.9 gpm 45.1 L/min	11.9 gpm 45.1 L/min
Category, 3-point hitch	CAT I	I	I	I
Hitch lift capacity	3306 lb 1500 kg	3306 lb 1500 kg	2689.6 lb 1220 kg	2689.6 lb 1220 kg
Hitch lift capacity at 24 inches behind link ends	2425 lb 1100 kg	2425 lb 1100 kg	1764 lb 673 kg	1764 lb 673 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Loader: 2 / Rear: 0	Loader: 4 / Rear: 0	1	1
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Wet/Multi disc	Wet/Multi disc	Electric/Hydro	Electric/Hydro
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	7.1 gal 27 L	7.1 gal 27 L	9.0 gal 34 L	9.0 gal 34 L
Coolant	5.8 qt 5.5 L	6.2 qt 5.9 L	6.9 qt 6.5 L	6.9 qt 6.5 L
Crankcase	4.8 qt 4.5 L	4.8 qt 4.5 L	6.8 qt 6.4 L	6.8 qt 6.4 L
Transmission/Hydraulics system	4815R: 9 gal 34 L 4815H: 9.8 gal 37 L	9.8 gal 37 L	8.5 gal 32.2 L	8.5 gal 32.2 L
Front axle	6.8 qt 6.4 L	6.8 qt 6.4 L	8.7 qt 2.1 L	8.7 qt 2.1 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	120.9 in. 3071 mm	120.9 in. 3071 mm	131 in. 3320 mm	131 in. 3320 mm
Overall width	56.3 in. 1430 mm	55.6 in. 1413 mm	54.5 in. 1385 mm	54.5 in. 1385 mm
Wheelbase	65.7 in. 1670 mm	65.7 in. 1670 mm	69.7 in. 1770 mm	69.7 in. 1770 mm
Height to top of ROPS	97.3 in. 2471 mm	-	94.5 in. 2400 mm	-
Height to top of cabin	-	mm in. 2267 89.3	-	92.5 in. 2350 mm
Min. ground clearance	14.4 in. 366 mm	13.1 in. 334 mm	12.8 in. 325 mm	12.8 in. 325 mm
Min. turn radius with brakes	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	106.7 in. 2710 mm	106.7 in. 2710 mm
Min. turn radius without brakes	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	117.5 in. 2985 mm	117.5 in. 2985 mm
Weight with ROPS	3278 lb 1487 kg	-	3289 lb 1492 kg	-
Weight with cab	-	3587 lb 1636 kg	-	3607 lb 1636 kg
STANDARD TIRES				
R1 Agricultural - Front	8-16	7-16	Farm Specialist 8.0-16 NHS TL 6PR	Farm Specialist 8.0-16 NHS TL 6PR

MODEL	4815	4815C	T474	T474C
R1 Agricultural - Rear	12.4-24	11.2-24	Farm Specialist 12.4-24 NHS TL 6PR	Farm Specialist 12.4-24 NHS TL 6PR
R3 Turf - Front			Multi-Trac CS 27x10.5-15 NHS TL 4PR	Multi-Trac CS 27x10.5-15 NHS TL 4PR
R3 Turf - Rear			12.5x20	12.5x20
R4 Industrial - Front	10-16.5	28x8.5-14	Trac Chief 10-16.50 NHS TL 6PR	Trac Chief 10-16.50 NHS TL 6PR
R4 Industrial - Rear	420/70×24	15-19.5	Xtra Grip 43x16.00-20 NHS TL 6PR	Xtra Grip 43x16.00-20 NHS TL 6PR



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world