

T4058PC

Compact Utility, Series 4
58 hp



A premium compact utility tractor that delivers power and efficiency

When it comes to all-around productivity, look no further than the T4058PC. This compact utility tractor is designed to boost output, delivering impressive efficiency and deluxe features that have become the hallmark of the TYM Series 4.



1. New iconic hood



3. Electronic 4WD engagement



2. Tilt steering wheel



4. Digital instrument panel



5. Comfortable suspension seat



6. External hitch switch




Eco-friendly TYM Tier 4 engine

Equipped with the Turbo charged company designed-and-made TYM engine, the tractor is designed to be eco-friendly and fuel efficient but makes no compromise on performance and reliability.



Electronic hydraulic control system

The system allows for easy control of operations for 3pt-hitch control, turn/back up and draft sensitivity adjustment and giving operators full control over their task at hand.

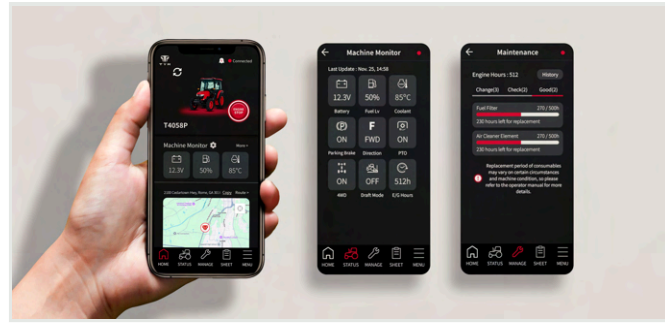

MYTYM telematics system

Through MYTYM's remote diagnostics service, check the real-time monitoring, enhanced maintenance and improved operational efficiency.




Front LED work lighting bar

The cabin version introduces an LED bar-type front worklight, ideal for low-light tasks and extended operational hours and enhance the productivity.



Power shuttle and D-clutch

Power shuttle enhances efficiency for tasks requiring frequent directional changes in tighter spaces without stepping on the clutch pedal and enhance the maneuverability.

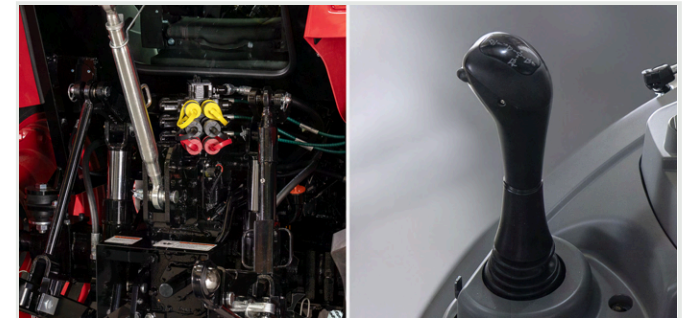

6-Ports front/rear external hydraulic valve with 2-buttons joystick

The 6-port front selective control valves allows for a wide variety of implements to be installed. This allows for easy and efficient grapple operation.

Technical specifications

| ENGINE | |
|--------------------------------|-------------------------|
| Engine manufacturer | TYM T2300T1-UTC_4 |
| Type | Turbo charger |
| Gross engine power | 58 hp 43.3 kW |
| PTO power | 48 hp 35 kW |
| Rated engine speed | 2600 rpm |
| No. of cylinders | 4 |
| Displacement | 139.5 cu. in. 2287 cc |
| Air cleaner | Dry element |
| Alternator | 12V, 70A |
| Fuel system | IDI |
| POWERTRAIN | |
| Transmission type | Power shuttle |
| No. of speeds | F12 x R12 |
| Max. traveling speed | 24.04 mph 38.7 km/h |
| Brakes | Wet, Multi disc |
| Steering | Hydrostatic |
| Clutch | Wet Multi disc |
| CAPACITIES | |
| Fuel tank | 15.3 gal 58 L |
| Coolant | 6.2 qt 5.9 L |
| Crankcase | 4.8 qt 4.5 L |
| Transmission/Hydraulics system | 11.62 gal 44 L |
| Front axle | 6.8 qt 6.4 L |

| PTO | |
|---|---|
| PTO type | Independent |
| PTO control | Wet, Multi-disc |
| PTO rear | 540 rpm |
| HYDRAULIC SYSTEM | |
| Pump type | Single gear pump |
| Implement flow | 11.4 gpm 43.2 L/min |
| Steering flow | 5.13 gpm 19.44 L/min |
| Total flow | 16.5 gpm 62.6 L/min |
| Category, 3-point hitch | II |
| Hitch lift capacity | 4409 lb 2000 kg |
| Hitch lift capacity at 24 inches behind link ends | 3748 lb 1700 kg |
| Lift control type | Position |
| No. of standard remote valves | Loader: 6 / Rear: 6 |
| DIMENSIONS & WEIGHTS | |
| Overall length with 3-point hitch | 141.5 in. 3595 mm |
| Overall width | 68.9 in. 1750 mm |
| Wheelbase | 78.7 in. 2000 mm |
| Height to top of ROPS | - |
| Height to top of cabin | 99.2 in. 2520 mm |
| Min. ground clearance | 18.1 in. 460 mm |
| Min. turn radius with brakes | (L) 121.9 in. 3098 mm / (R) 125.3 in. 3184 mm |
| Min. turn radius without brakes | (L) 139.7 in. 3550 mm / (R) 141.9 in. 3606 mm |
| Weight with ROPS | - |
| Weight with cab | 4951.5 lb 2246 kg |
| STANDARD TIRES | |
| R1 Agricultural - Front | 9.5-20 |
| R1 Agricultural - Rear | 14.9-28 |
| R4 Industrial - Front | 10.5/80-18 |
| R4 Industrial - Rear | 16.9-24 |
| Golf Tires - Front | 29x12.5-15 |
| Golf Tires - Rear | 44x18.00-20 |

L4058PC Front-End Loader

Attachments

The BL350 front-end loader takes advantage of the power and durability of TYM 5835 tractors. Ideal for tasks that require more strength, the BL350 front-end loader can help you get your tasks done more efficiently.

| | |
|--|-------------------------|
| Lift height | 117.5 in. 2984 mm |
| Lift capacity at pivot point (max. height) | 3437 lb 1559 kgf |
| Bucket capacity | 9.5 cu. ft 0.27 cu. m |

| CAPACITIES & REACH | |
|---|-----------------------------|
| Lift height | 117.5 in. 2984 mm |
| Max. lift height under level bucket | 108.9 in. 2766 mm |
| Clearance with bucket dumped | 89.6 in. 2275 mm |
| Reach at maximum lift height | 21.3 in. 541 mm |
| Max. dump angle | 55° |
| Reach with bucket on ground | 76.9 in. 1952 mm |
| Max. rollback angle | 41° |
| Digging depth | 4.7 in. 120 mm |
| Lift capacity at pivot point (max. height) | 3437 lb 1559 kgf |
| Breakout force at ground level, pivot pins | 4742 lb 2151 kgf |
| Bucket rollback force at ground line | 4032 lb 1829 kgf |
| Bucket capacity | 9.5 cu. ft 0.27 cu. m |
| Self leveling | NA |
| Relief valve setting (loader control valve) | 2489 psi 175 kg/sq. cm |
| Compatible bucket sizes | 66" Front-end loader bucket |



| DIMENSIONS & WEIGHTS | |
|--|----------------------------|
| Overall height in carry position | 52.1 in. 1324 mm |
| Depth of Attachment (to the back of the inner shell) | 20.9 in. 530 mm |
| Height of Attachment | 20.9 in. 530 mm |
| Length of Attachment (to pivot pin) | 28.2 in. 690 mm |
| Weight of boom & quick attach mechanism (1) | 717 lb 325 kg |
| Weight of mounting frame (2) | 334 lb 151 kg |
| Weight of bucket (3) | 251 lb 114 kg |
| Loader total weight (1+2+3) | 1300 lb 590 kg |
| Lift cylinder | 2.6 × 1.4 in. 66 × 35 mm |
| Bucket cylinder | 2.4 × 1.4 in. 60 × 35 mm |
| Attachment used for specification | 72 in. 1830 mm |
| CYCLE TIMES | |
| Boom raising time | 5.2 sec |
| Boom lowering time | 3.7 sec |
| Bucket rollback time | 2.3 sec |
| Bucket dumping time | 3.5 sec |

BH86 Backhoe

Attachments

For heavy duty tasks, you can depend on TYM BH350 to deliver performance and power. Built to take advantage of the features of TYM Series 3 5835 tractors, the TYM BH350 backhoe attachment is ideal for applications that require the extra power.

| | |
|----------------|---------------------|
| Digging depth | 2621 mm 103.2 in. |
| Loading height | 2347 mm 92.4 in. |
| Backhoe reach | 3414 mm 134.4 in. |

PERFORMANCE

| | |
|---------------------|---------------------|
| Digging depth | 2621 mm 103.2 in. |
| Loading height | 2347 mm 92.4 in. |
| Max. leveling angle | 10° |
| Angle of departure | 21° |

CAPACITIES & REACH

| | |
|--------------------------------------|---------------------|
| Backhoe reach | 3414 mm 134.4 in. |
| Swing angle | 180° |
| Bucket rotation | 151° |
| Stabilizer spread (lowered position) | 88.8 in. 2256 mm |
| Stabilizer spread (raised position) | 68.4 in. 1737 mm |



DIMENSIONS & WEIGHTS

| | |
|-------------------------|--------------------|
| Transport overhang | 50.4 in. (1280 mm) |
| Transport height (max.) | 91.2 in. 2317 mm |
| Compatible bucket sizes | 9" backhoe bucket |
| Compatible bucket sizes | 12" backhoe bucket |
| Compatible bucket sizes | 16" backhoe bucket |
| Compatible bucket sizes | 18" backhoe bucket |
| Compatible bucket sizes | 24" backhoe bucket |
| Compatible bucket sizes | 36" backhoe bucket |

COMPATIBLE BUCKET SIZES

TYM's multi-purpose buckets are capable of bulldozing, scraping, loading, metering, moving, and clamping material.

| | |
|----------|----------|
| Large_09 | Large_12 |
| Large_16 | Large_18 |
| Large_24 | Large_36 |

Upgrades for the Series 4, T4058PC

Complement the capabilities of your TYM tractor with compatible accessories and options.

Accessories

T85A Mechanical Thumb



Options

| | | | |
|------|-----------------------|----------------|-----------|
| Tire | R4 Industrial Tires | F 10.5/80 - 18 | R 16.9-24 |
| Tire | R1 Agricultural Tires | F 9.5 - 20 | R 14.9-28 |



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world