

2500


Sub-Compact, Series 2

24 hp



A versatile sub-compact tractor for projects of all sizes

The T2024 (2500) is a highly maneuverable sub-compact tractor that offers both versatility and power, and perfect for everyone from hobbyists to groundskeepers. Experience the convenience of a ride-on mower with the capabilities of a full-size tractor.

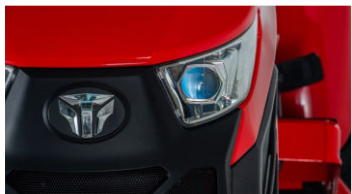

1. New iconic hood



3. Ergonomic lever



2. Comfortable suspension seat



4. Responsive forward/reverse HST (T2024 (2500H))



5. PTO lever



6. 2 port rear hydraulic control (optional)




Eco-friendly 3-cylinder Stage V TYM engine

The T2024 (2500) is equipped with a naturally aspirated engine designed and manufactured by TYM. While designed to be fuel efficient and eco-friendly, the TYM engine makes no compromise on performance and reliability.



High-visibility instrumental panel

Be fully aware of your working conditions. The clear instrumental panel on TYM tractors enables you to keep track of essential information such as speed, fuel, and tractor status at all times.

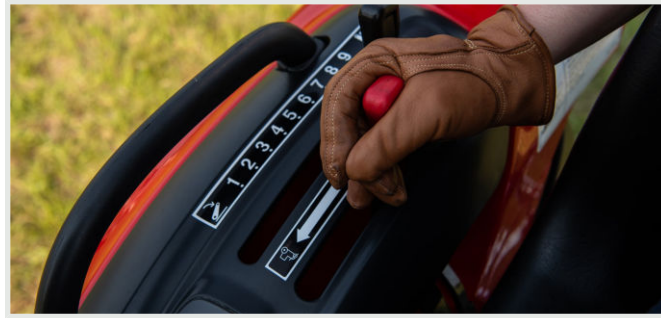

Four-wheel drive

Standard four-wheel drive on these tractors result in higher work efficiency, even in the most challenging environments.



Foldable ROPS

The Roll Over Protective Structure (ROPS) of the tractor is designed to be folded, allowing for easy storage in garages, sheds, and other low-ceiling structures.



Cruise control (HST)

The cruise control function allows you to set and maintain engine RPM, regardless of the tractor's load conditions.



High ground clearance

An impressive ground clearance of 307mm makes it possible for to operate without difficulty on rocky or uneven terrain

Technical specifications

ENGINE

Engine Manufacturer	TYM T1100N2
Type	Natural aspiration
Gross engine power	24 hp 18 kW
PTO power	20.7 hp 15.5 kW
Rated engine speed	2800 rpm
No. of cylinders	3
Displacement	1175 cc 71.7 cu. in.
Air cleaner	Dry element
Alternator	12V, 60A
Fuel system	Water-cooled diesel

POWERTRAIN

Transmission type	2500R: Constant mesh 2500H: HST
No. of speeds	2500R: F6 x R2 2500H: 2 Range
Max. traveling speed	2500R: 19.2 km/h 11.9 mph 2500H: 21.5 km/h 13.4 mph
Brakes	Wet, Multi disc
Steering	Hydrostatic
Clutch	Dry single plate

CAPACITIES

Fuel tank	23 L 6.0 gal
Coolant	5 L 5.3 qt
Crankcase	3.2 L 3.4 qt
Transmission/Hydraulics system	2500R: 14 L 3.7 gal 2500H: 10 L 2.6 gal
Front axle	3.3 L 3.5 qt

PTO

PTO type	Live
PTO control	Manual
PTO rear	Rear: 540/1000 rpm Mid: 2500 rpm

HYDRAULIC SYSTEM

Pump type	Gear pump
Implement flow	17.6 L/min 4.7 gpm
Steering flow	12.6 L/min 3.3 gpm
Total flow	30.2 L/min 7.9 gpm
Category, 3-point hitch	I
Hitch lift capacity	512 kg 1129 lb
Hitch lift capacity at 24 inches behind link ends	328 kg 724 lb
Lift control type	Position
No. of standard remote valves	Optional (2)

DIMENSIONS & WEIGHTS

Overall length with 3-point hitch	3055 mm 120.3 in.
Overall width	1321 mm 52.0 in.
Wheelbase	1502 mm 59.1 in.
Height to top of ROPS	F-ROPS : 2058 mm 81.0 in. ROPS : 2253 mm 88.7 in.
Height to top of Cabin	2139 mm 84.2 in.
Min. ground clearance	F-ROPS & ROPS: 375 mm 14.8 in. Cab: 375 mm 14.8 in.
Min. turn radius with brakes	2240 mm 88.2 in.
Min. turn radius without brakes	2700 mm 106.3 in.
Weight with ROPS	F-ROPS: 924 kg 2037 lb ROPS: 888 kg 1958 lb
Weight with cab	2500R: 1035 kg 2281.8 lb 2500H: 1019 kg 2246.5 lb


STANDARD TIRES

R1 Agricultural - Front	1: 6-12 4PR 2: 6-12 4PR
R1 Agricultural - Rear	1: 9.5-16 6PR 2: 9.5-18 8PR
R3 Turf - Front	23x8.50-12
R3 Turf - Rear	33x12.50-16.5
R4 Industrial - Front	23x8.50-12
R4 Industrial - Rear	12-16.5

BM60E Mid-Mount Mower

Attachments

Built with 60-inch working width cutting deck and 5.12-inch transport height, the TYM BM60E mid-mount mower attachment is designed to optimize your cutting time and improve cut quality.

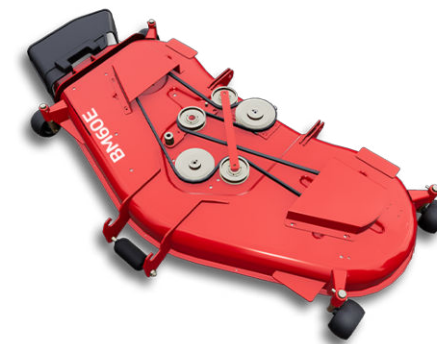

PERFORMANCE

No. of blades	3 EA
Blade Velocity	3363 fpm
Blade Length	528.3 mm 20.8 in.
Power Rating	13.4-14.9 kW (18-20 hp)

DIMENSIONS & WEIGHTS

Working width	1524 mm 60 in.
Length	38.2 mm 1.5 in.
Width	74.3 mm 2.92 in.
Height	7.2 mm 0.28 in.
Weight	123.4 kg 272 lb
Cutting height	25.4 - 101.6 mm 1 - 4 in.
Transport height	129.5 mm 5.1 in.

GENERAL

Type	Side discharge
Mounting method	Parallel linkage
Lift linkage type	Lower link lift
Adjustment of increment	Dial gauge
Dial gauge hole	7 EA
Dial gauge gab between hole	12.7 mm 0.5 in.
Dial gauge total gab	76.2 mm (3 in.)
Universal joint	Ø21.6 × 525 L
Wheel	4 EA
Assistant wheel	1 EA
Belt	V-Belt
Color	RED
Deck thickness	3.3 mm 0.13 in.

Upgrades for the Series 2 2500

Complement the capabilities of your TYM tractor with compatible accessories and options.

ACCESSORIES



OPTIONS

Tire	R1 Agricultural Tires	F 6 - 12	R 9.5-16
Tire	R4 Industrial Tires	F 23x8.50 - 12	R 12-16.5
Tire	R3 Turf Tires	F 23x8.50 - 12	R 33x12.50-16.5



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world