

2610

Sub Compact, Series 1
24 hp



A sub-compact tractor built for everyday efficiency and versatility

Enhanced performance and effortless maneuverability make the 2610 tractor perfect for everyday tasks and beyond. From simple yard work to more ambitious projects, this versatile tractor is well-suited for a range of tasks.



1. New iconic hood



3. Ergonomic lever



5. PTO lever




2. Comfortable suspension seat



4. Responsive forward & reverse HST



6. 2 port rear hydraulic control (optional)

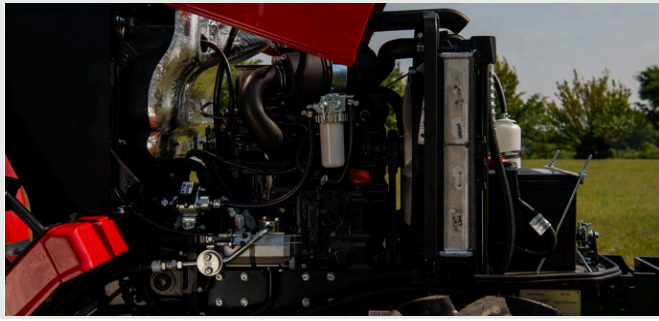

Eco-friendly TYM Tier 4 engine

Equipped with a naturally aspirated engine designed and manufactured by TYM, the tractor is designed to be eco-friendly and fuel-efficient without compromising on performance.



Four-wheel drive

Four-wheel drive comes as a standard for higher work efficiency, even in the most challenging environment.



Cruise control (HST)

The cruise control function allows you to set and maintain engine RPM, regardless of the tractor's load conditions.



High-visibility instrumental panel

Be fully aware of your working conditions. An instrumental panel with high visibility enables you to keep track of essential information such as speed, fuel, and the status of your tractor at any time of the day.



Foldable ROPS

The Roll Over Protective Structure (ROPS) of the tractor is designed to be folded, allowing for easy storage in garages, sheds, and other low-ceiling structures.



Ground clearance

Ground clearance of 307 mm makes operation on rocky or uneven terrain easier than ever before.

Technical specifications

ENGINE	
Engine manufacturer	TYM T1100N2
Type	Natural aspiration
Gross engine power	24 hp 17.9 kW
PTO power	18 hp 13.5 kW
Rated engine speed	2850 rpm
No. of cylinders	3
Displacement	71.7 cu. in. 1175 cc
Air cleaner	Dry element
Alternator	12V, 60A
Fuel system	IDI
POWERTRAIN	
Transmission type	HST
No. of speeds	3-Range
Max. traveling speed	17 mph 27.5 km/h
Brakes	Wet, Multi disc
Steering	Hydrostatic
Clutch	Dry single plate
CAPACITIES	
Fuel tank	6.0 gal 23 L
Coolant	5.3 qt 5 L
Crankcase	2.9 qt 2.8 L
Transmission/Hydraulics system	3.7 gal 14 L
Front axle	3.5 qt 3.3 L

PTO	
PTO type	Live
PTO rear	540/1000 rpm
HYDRAULIC SYSTEM	
Pump type	Dual gear pump
Implement flow	4.65 gpm 17.6 L/min
Steering flow	3.3 gpm 12.6 L/min
Total flow	7.9 gpm 30.2 L/min
Category, 3-point hitch	I
Hitch lift capacity	1499 lb 680 kg
Hitch lift capacity at 24 inches behind link ends	974 lb 442 kg
Lift control type	Position
No. of standard remote valves	Optional (2)
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	122.9 in. 3122 mm
Overall width	53.8 in. 1369 mm
Wheelbase	65.7 in. 1670 mm
Height to top of ROPS	91.5 in. 2328 mm
Height to top of cabin	-
Min. ground clearance	15.1 in. 382 mm
Min. turn radius with brakes	(L) 9.3 ft 2820 mm / (R) 9.2 ft 2790 mm
Min. turn radius without brakes	(L) 9.6 ft 2930 mm / (R) 9.5 ft 2900 mm
Weight with ROPS	2106 lb 956 kg
Weight with cab	-
STANDARD TIRES	
R1 Agricultural - Front	7-16
R1 Agricultural - Rear	11.2-20
R3 Turf - Front	23x8.50-12
R3 Turf - Rear	33x12.50-16.5
R4 Industrial - Front	23x8.50-12
R4 Industrial - Rear	12-16.5

BM60L Mid-Mount Mower


Attachments

Built with 60-inch working width cutting deck and 5.12-inch transport height, the TYM BM60L mid-mount mower attachment is designed to optimize your cutting time and improve cut quality.

Blade velocity	3363 fpm
Blade length	528.3 mm 20.8 in.
Working width	1524 mm 60 in.

PERFORMANCE	
No. of blades	3 EA
Blade velocity	3363 fpm
Blade length	528.3 mm 20.8 in.
Power rating	20-25 hp (14.9-18.6 kW)

GENERAL	
Type	Side discharge
Mounting method	Parallel linkage
Lift linkage type	Lower link lift
Adjustment of increment	Dial gauge
Dial gauge hole	7 EA
Dial gauge gab between hole	0.5 in. (12.7 mm)
Dial gauge total gab	3 in. (76.2 mm)

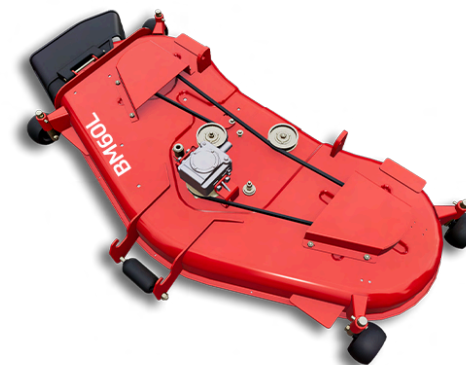

Universal joint	Ø21.6 × 503~670 L
Wheel	4 EA
Assistant wheel	1 EA
Belt	V-Belt
Color	Dark Blue
Deck thickness	0.13 in. (3.3 mm)

DIMENSIONS & WEIGHTS	
Working width	1524 mm 60 in.
Length	1.4 in. (37 mm)
Width	2.8 in. (71.9 mm)
Height	0.4 in. (11 mm)
Weight	272 lb (123.3 kg)
Cutting height	1 - 4 in. (25.4 - 101.6 mm)
Transport height	5.1 in. (129.5 mm)

BL110S Front-End Loader

Attachments

Enhance the functionality of your TYM sub-compact tractor with the BL110S front-end loader. With impressive lift capacity and height, this TYM front-end loader can help you lift, move and handle material more effectively.

Lift height	91.1 in. 2313 mm
Lift capacity at pivot point (max. height)	1373 lb 623 kgf
Bucket capacity	5.3 cu. ft 0.15 cu. m

CAPACITIES & REACH	
Lift height	91.1 in. 2313 mm
Max. lift height under level bucket	86.4 in. 2194 mm
Clearance with bucket dumped	69.4 in. 1762 mm
Reach at maximum lift height	23.4 in. 595 mm
Max. dump angle	48°
Reach with bucket on ground	63.0 in. 1599 mm
Max. rollback angle	32°
Digging depth	4.2 in. 106 mm
Lift capacity at pivot point (max. height)	1373 lb 623 kgf
Breakout force at ground level, pivot pins	2077 lb 942 kgf
Bucket rollback force at ground line	1382 lb 627 kgf
Bucket capacity	5.3 cu. ft 0.15 cu. m
Self leveling	NA
Relief valve setting (loader control valve)	2276 psi 160 kg/sq. cm
Compatible bucket sizes	66" Front-end loader bucket

DIMENSIONS & WEIGHTS	
----------------------	--



Overall height in carry position	43.9 in. 1115 mm
Depth of Attachment (to the back of the inner shell)	18.2 in. 462 mm
Height of Attachment	19.1 in. 484 mm
Length of Attachment (to pivot pin)	25.1 in. 638 mm
Weight of boom & quick attach mechanism (1)	373 lb 169 kg
Weight of mounting frame (2)	136 lb 62 kg
Weight of bucket (3)	146 lb 66 kg
Loader total weight (1+2+3)	654 lb 297 kg
Lift cylinder	1.8 × 1.2 in. 45 × 30 mm
Bucket cylinder	2.0 × 1.2 in. 50 × 30 mm
Attachment used for specification	52 in. 1320 mm

CYCLE TIMES	
Boom raising time	4.3 sec
Boom lowering time	2.4 sec
Bucket rollback time	2.7 sec
Bucket dumping time	4.2 sec

Upgrades for the Series 1, 2610

Complement the capabilities of your TYM tractor with compatible accessories and options.

Accessories



Options

Tire	R1 Agricultural Tires	F 7 - 16	R 11.2-20
Tire	R3 Turf Tires	F 23x8.50 - 12	R 33x12.50-16.5
Tire	R4 Industrial Tires	F 25x8.50 - 14	R 14-17.5



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world