

2025 Catalog

Series 2

Sub-Compact Tractors

24 - 24.7 hp



For distribution and sales in International territories only

Series 2 Sub-Compact Tractors

The Series 2 tractors are built to take on more demanding tasks—all within a compact frame designed to handle everyday chores and

tough challenges. Use the front-end loader to transport material or the rear hitch for tow-behind attachments to clean up efficiently.



T265

Engine power Lift capacity
24 hp 696 kg



2500

Engine power Lift capacity
24 hp 512 kg



2500L

Engine power Lift capacity
24 hp 512 kg



T25

Engine power Lift capacity
24.7 hp 703.6 kg

Built to tackle a variety of tasks on your land

The Series 2 tractors have enhanced performance capabilities while maintaining compact frames. Functional design and precision engineering come together to promote productivity, from the Stage V certified engine to the ergonomically configured operator platform.

Use a Series 2 tractor to maintain a healthy lawn, build a home garden, take care of yard work, or create a lively home farm. Front-end loader, mid-mount mower and rear hitch linkages enable you to attach a variety of attachments and do more per cycle.

Most popular applications



Arable Farming





Construction



Snow Clearing



Landscaping

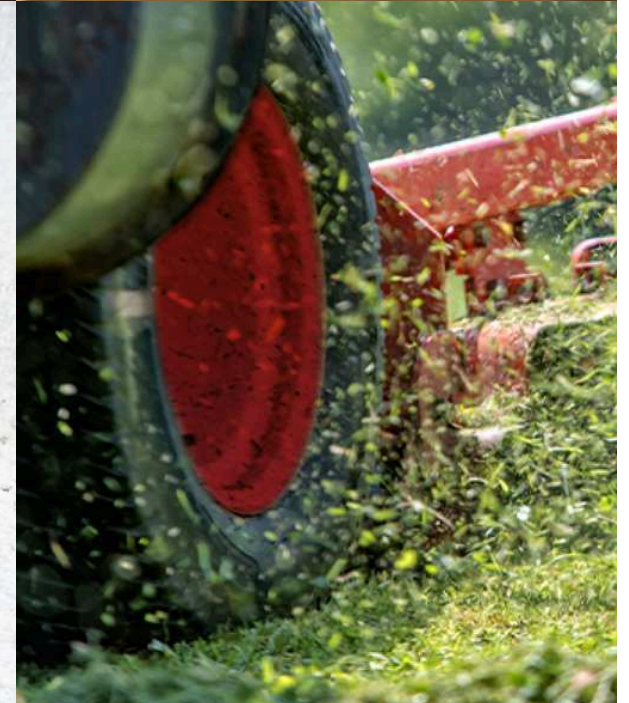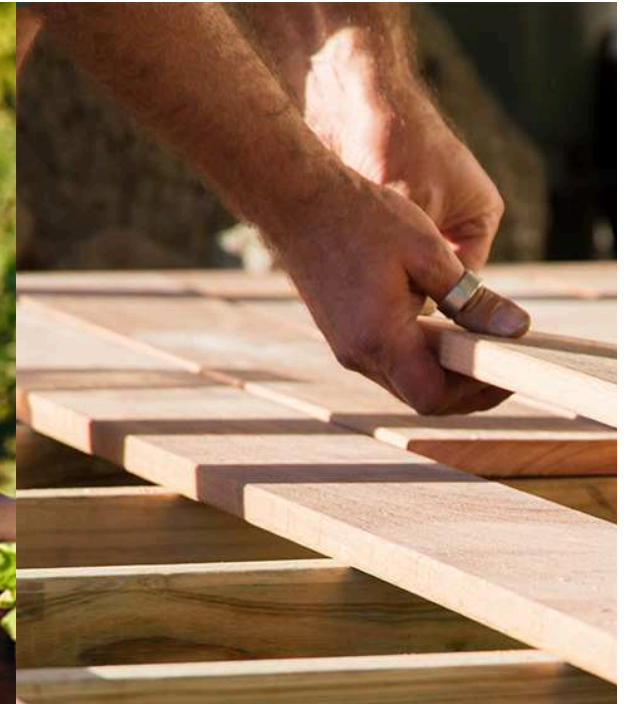

All the right features to get the job done



Ergonomic features for enhanced productivity

A wide operator cabin with a flat floor offers good visibility and ample leg room, promoting comfortable operation. All controls are within arm's reach, including a dial to control the cutting height of the mid-mount implement. The accelerator, brake pedal, differential lock, and parking brake are easily accessible on the floor of the cabin, located precisely where you expect them to be. These features make this tractor easy to operate, even for novice drivers



Simple and effective TYM engine

This tractor comes equipped with the South Korean-made TYM engine and is naturally aspirated. The minimal design and minimized emissions results in a more efficient engine, lowering fuel and maintenance costs.



High-capacity fuel tank for time-intensive work

The high-capacity fuel tank allows the tractor to operate for longer periods without stopping to refuel. Paired with a fuel-efficient engine, this enables uninterrupted and efficient operations during the busiest seasons.



Dual filter air cleaner for engine longevity

An additional filter protects the tractor's engine from harmful particles, drastically extending the engine life.



Cast iron components for sturdier connections

To perform durably with heavier loads, the rear of the rear of this tractor features sturdy cast-iron components to connect implements. The material enhances efficiency of the hydraulics and helps increase component lifecycles.



Easy to open hood for convenient maintenance

The tractor hood can be opened in one motion, providing easy access to the engine and other systems for daily checks, routine service, and maintenance. The side panel can also be removed easily without the need for specialized tools.

T265

A versatile sub-compact tractor designed for maneuverability



1. Optional loader with high lift capacity



2. PTO on/off switch



3. Dual filter air cleaner

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1100N4

Lift capacity
696 kg | 1534 lb

PTO power
17.1 hp | 12.8 kW



4. Cruise control



5. Foldable ROPS



6. Joystick control for front loader

2500

A versatile sub-compact tractor for projects of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1100N2

Lift capacity
512 kg | 1129 lb

PTO power
20.7 hp | 15.5 kW



4. Responsive forward/reverse HST (2500H)



5. PTO lever



6. 2 port rear hydraulic control (optional)

2500L

A versatile sub-compact tractor for projects of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power

24 hp | 18 kW

Engine manufacturer

TYM T1100N2

Lift capacity

512 kg | 1129 lb

PTO power

**2500L: 20.7 hp | 15.5 kW
 2500HL: 18 hp | 13.5 kW**



4. Highly responsive forward & reverse HST (2500HL)



5. PTO lever




6. 2 port rear hydraulic control (optional)

T25

A sub-compact tractor engineered for productivity inside and out



1. 2 range hydrostatic transmission (HST)



2. 3rd function hydraulic valve



3. 2 USB ports

Key specifications:

Engine power
24.7 hp | 18.4 kW

Engine manufacturer
Yanmar 3TNV80F-NXD

Lift capacity
703.6 kg | 1551.2 lb

PTO power
16.6 hp | 12.5 kW



4. Waterproof Bluetooth speaker



5. Wireless smartphone charger



6. Wide loadspace with toolbox

Specification Guide

MODEL	T265	2500	2500L	T25
ENGINE				
Engine manufacturer	TYM T1100N4	TYM T1100N2	TYM T1100N2	Yanmar 3TNV80F-NXD
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	24 hp 18 kW	24 hp 18 kW	24 hp 18 kW	24.7 hp 18.4 kW
PTO power	17.1 hp 12.8 kW	20.7 hp 15.5 kW	2500L: 20.7 hp 15.5 kW 2500HL: 18 hp 13.5 kW	16.6 hp 12.5 kW
Rated engine speed	2600 rpm	2800 rpm	2800 rpm	3000 rpm
No. of cylinders	3	3	3	3
Displacement	1175 cc 71.7 cu. in.	1175 cc 71.7 cu. in.	1175 cc 71.7 cu. in.	1267 cc 77.3 cu. in.
Air cleaner	Dual dry	Dry element	Dry element	Single dry
Alternator	12V, 50A	12V, 60A	12V, 60A	12V, 40A
Fuel system	IDI	Water-cooled diesel	Water-cooled diesel	IDI
POWERTRAIN				
Transmission type	HST	2500R: Constant mesh 2500H: HST	2500L: Constant mesh 2500HL: HST	HST
No. of speeds	Infinite 2-Range	2500R: F6 x R2 2500H: 2 Range	2500L: F6 x R2 / F9 x R3 2500HL: 2 Range / 3 Range	Infinite 2-Range
Max. traveling speed	22.4 km/h 13.9 mph	2500R: 19.2 km/h 11.9 mph 2500H: 21.5 km/h 13.4 mph	2500L 21.9 km/h 13.6 mph 22.6 km/h 14 mph 2500HL 24.6 km/h 15.3 mph 26.2 km/h 16.3 mph	20.4 km/h 12.7 mph
Brakes	Wet disc	Wet, Multi disc	Wet, Multi disc	Wet disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	N/A	Dry single plate	Dry single plate	N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Gear pump	Gear pump	Single gear pump
Implement flow	16.6 L/min 4.4 gpm	17.6 L/min 4.7 gpm	17.6 L/min 4.7 gpm	15.8 L/min 4.2 gpm
Steering flow	10.4 L/min 2.7 gpm	12.6 L/min 3.3 gpm	12.6 L/min 3.3 gpm	10.5 L/min 2.8 gpm
Total flow	26.9 L/min 7.1 gpm	30.2 L/min 7.9 gpm	30.2 L/min 8.0 gpm	26.3 L/min 7.0 gpm
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	696 kg 1534 lb	512 kg 1129 lb	512 kg 1129 lb	703.6 kg 1551.2 lb
Hitch lift capacity at 24 inches behind link ends	500 kg 1102 lb	328 kg 724 lb	328 kg 724 lb	557.8 kg 1229.7 lb
Lift control type	Position	Position	Position	Position
No. of standard remote valves	4-0	Optional (2)	Optional (2)	Optional (1)
PTO				
PTO type	Independent	Live	Live	Independent
PTO control	Electric/Hydro	Manual	Manual	Electric/Hydro
PTO rear	540 rpm	Rear: 540/1000 rpm Mid: 2500 rpm	Rear: 540/1000 rpm Mid: 2500 rpm	540 rpm
CAPACITIES				
Fuel tank	25 L 6.6 gal	23 L 6.0 gal	23 L 6.0 gal	25 L 6.6 gal
Coolant	5.6 L 5.9 qt	5 L 5.3 qt	5 L 5.3 qt	3.6 L 3.8 qt
Crankcase	4.3 L 4.5 qt	3.2 L 3.4 qt	3.2 L 3.4 qt	2.7 L 2.9 qt
Transmission/Hydraulics system	17 L 4.5 gal	2500R: 14 L 3.7 gal 2500H: 10 L 2.6 gal	10 L 2.6 gal	17 L 5.8 gal
Front axle	4.5 L 4.8 qt	3.3 L 3.5 qt	3 L 3.2 qt	4.5 L 4.7 qt
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	2868 mm 112.9 in.	3055 mm 120.3 in.	3124 mm 123 in.	2829 mm 111.4 in. in.
Overall width	1430 mm 56.3 in.	1321mm 52.0 in.	1419 mm 55.9 in.	1384 mm 54.5 in.
Wheelbase	1480 mm 58.3 in.	1502 mm 59.1 in.	1672 mm 65.8 in.	1550 mm 61 in.
Height to top of ROPS	2514 mm 99.0 in.	F-ROPS : 2058 mm 81.0 in. ROPS : 2253 mm 88.7 in.	F-ROPS: 2102 mm 82.8 in. ROPS: 2330 mm 91.7 in.	2505 mm 98.6 in.
Height to top of cabin	-	2139 mm 84.2 in.	-	-
Min. ground clearance	240 mm 9.4 in.	F-ROPS & ROPS: 375 mm 14.8 in. Cab: 375 mm 14.8 in.	417 mm 16.4 in.	267 mm 10.5 in.

MODEL	T265	2500	2500L	T25
Min. turn radius with brakes	2502 mm 98.5 in.	2240 mm 88.2 in.	2700 mm 106.3 in.	2602 mm 102.4 in.
Min. turn radius without brakes	2682 mm 105.5 in.	2700 mm 106.3 in.	2240 mm 88.2 in.	2782 mm 109.5 in.
Weight with ROPS	995 kg 2193.6 lb	F-ROPS: 924 kg 2037 lb ROPS: 888 kg 1958 lb	1: F-ROPS: 1022 kg / ROPS: 988 kg 2: F-ROPS: 985 kg / ROPS: 962 kg	1100 kg 2425 lb
Weight with cab	-	2500R: 1035 kg 2281.8 lb 2500H: 1019 kg 2246.5 lb	-	-
STANDARD TIRES				
R1 Agricultural - Front	6.0-12 4PR	1: 6-12 4PR 2: 6-12 4PR	1: 6-12 4PR 2: 6-12 4PR 3: 7-16 6PR 4: 200/70R16	6-12 4PR
R1 Agricultural - Rear	9.5-20 6PR	1: 9.5-16 6PR 2: 9.5-18 8PR	1: 9.5-16 6PR 2: 9.5-18 8PR 3: 11.2-20 8PR 4: 320/70R20	9.5-20 6PR
R3 Turf - Front	25x8.5-14 6PR	23x8.50-12	25x8.50-12	25x8.5-14 6PR
R3 Turf - Rear	36x13.5-15 4PR	33x12.50-16.5	33x12.50-16.5	36x13.5-15 4PR
R4 Industrial - Rear	23x8.5-12 4PR	12-16.5	33x12.50-16.5	1: 12-16.5 6PR 2: 14-17.5 4PR 3: 14-17.5 NHS
R4 Industrial - Rear	23x8.5-12 4PR	12-16.5	33x12.50-16.5	1: 12-16.5 6PR 2: 14-17.5 4PR 3: 14-17.5 NHS



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world